

# Lightology

lightology.com  
866-954-4489  
02-16-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1389376**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Lazer Line Static White Up or Down Suspended System 24VDC

By PureEdge Lighting



### Description

Lazer Line is a 24VDC direct or indirect (uplight or downlight) LED lighting system providing general illumination for architectural applications. The field-cuttable single channel in 3 and 5 watts per foot is sold in 1 inch increments and allows a maximum length of 30 feet (3 watt) or 20 feet (5 watt) with power feed at one end and one non-power turnbuckle, or a maximum length of 60 feet (3 watt) or 40 feet (5 watt) with power feed turnbuckles at both ends. The 4 inch round turnbuckles allow Lazer Line to be positioned 0-90 degrees relative to the mounting surface, creating a 3-dimensional appearance. Mounts to standard 4 inch square junction box with round plaster ring. Paint canopy to blend into wall for a seamless look. Note: System includes Lazer Line channel and mounting hardware. System requires a Universal remote power supply (dimmable TRIAC/ELV/0-10V), sold separately. Product is built to order.

### Specifications


COLOR . . . . . White  
BODY FINISH . . . . . Pure White  
WATTAGE . . . . . 15W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 60"L x 0.44"W  
INTEGRATED LED MODULE . . . . . 5 x LED/3W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
BEAM ANGLE . . . . . 120°  
COLOR RENDERING . . . . . 91 CRI  
LAMP COLOR . . . . . 2400K  
LUMENS/WATT . . . . . 421.67  
LUMINOUS FLUX . . . . . 1265 lumens



Shown in pure white / white

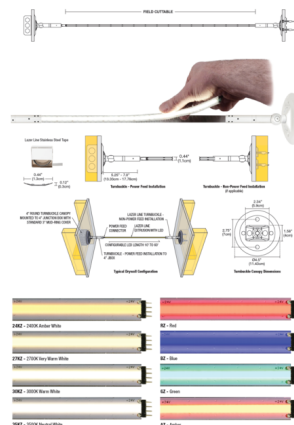

CLICK TO VIEW PRODUCT

Notes: