

Lightology

lightology.com
866-954-4489
02-12-26

Project:

Company:

Location:

Fixture Type:

SPEC #: EDG1405840

Approved On:

Approved By:

PSBB RGBTW Power Supply with Bridgebox for Ceiling Linear

By PureEdge Lighting




Description

The Pure Smart Wi-Fi PSBB RGBTW Power Supply for Ceiling Linear contains a Wi-Fi enabled WiZ Pro Type UR Bridgebox which allows for integration into the WiZ Pro Wireless control ecosystem. No hub required and provides 5 channel full color control of the TruColor RGBTW Light Engine. The WiZ App, WiZ Pro Dashboard, and Room Controllers (CWW-TW-SCENEWH and CWR-TW-SCENE-WH) from Pure Smart allow for dimming, CCT selection, grouping, scheduling, and the programming of preset and custom scenes. Voice control is available through integration with Amazon Alexa, Google Assistant, Siri Shortcuts, IFTTT, and SmartThings. Communicates via 2.4GHz Wi-Fi only. Accepts an input voltage in a range of 120-277V and outputs 24VDC power. Dims down to 5%. Integrated short circuit, overload, and thermal protection. Easily accessible external pushbutton allows for power cycling which triggers pairing mode to the connected smart device. The PSBB RGBTW Power Supply for Ceiling Linear is compatible with Cirrus Ceiling, Glide Ceiling, Nova Ceiling and Zipp Ceiling by PureEdge Lighting. NOTE: TC5W5 Power Supply: 5 Watts RGB and 5 Watts Tunable White TC5W7 Power Supply: 5 Watts RGB and 7 Watts Tunable White TC5W10 Power Supply: 5 Watts RGB and 10 Watts Tunable White



Shown in white

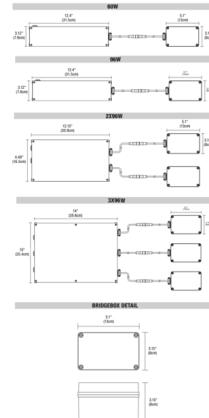

CLICK TO VIEW PRODUCT

Specifications

COLOR	N/A
BODY FINISH	White
WATTAGE	5W
DIMMER	N/A
DIMENSIONS	12.4"W x 2.18"H x 3.12"D
BULB INCLUDED	LED/5W/24V LED

Notes: