

Lightology

lightology.com
866-954-4489
07-03-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **WAC1425026**
Approved On: _____ Approved By: _____

Ocularc 2IN Round Color-Select Downlight Trim with Housing By WAC Lighting



Description

The Ocularc 2 Inch Round Downlight includes a trim and shallow IC Airtight New Construction Housing with driver designed to fit in tight plenum spaces. Compatible with ceiling thickness of 0.5-1.5 inches. Cutout: 3 1/16 inch. IC Rated: suitable for direct contact with insulation. Ocularc includes a color-select switch which allows user to field select between 2700K, 3000K, 3500K, 4000K and 5000K color temperature options. Includes TIR lens. TRIAC and ELV dimming at 120V. 0-10V dimming at 277V. NOTE: Sold as new construction, but may be reconfigured in the field for remodel.

Specifications


REFLECTOR/BAFFLE COLOR N/A
BODY FINISH White
WATTAGE 12W
DIMMER Low Voltage Electronic
DIMENSIONS 3.5"W x 3.88"H
INTEGRATED LED MODULE 1 x LED/12W/120-277V LED

Technical Information

APERTURE SHAPE Round
HOUSING HEIGHT 4"
HOUSING TYPE New construction IC Airtight
CEILING TYPE Drywall with Trim
FUNCTION Downlight
LAMP LIFE 50000 hours
BEAM ANGLE 18°
COLOR RENDERING 90 CRI
LAMP COLOR CCT Select
LUMENS/WATT 76.67
LUMINOUS FLUX 920 lumens



Shown in white

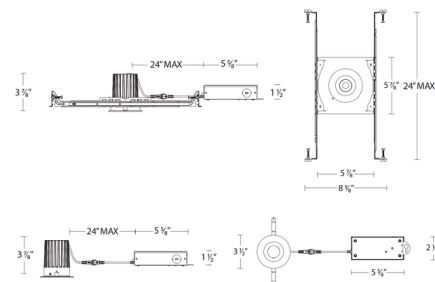

CLICK TO VIEW PRODUCT

Notes: