

# Lightology

lightology.com  
866-954-4489  
05-17-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **WAC1425079**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Ocularc 3 inch Round Color-Select Downlight Trim with Housing By WAC Lighting



### Description

The Ocularc 3 Inch Round Polycarbonate Downlight includes a trim and shallow IC Airtight New Construction Housing with driver designed to fit in tight plenum spaces. Compatible with ceiling thickness of 0.5-1.5 inches. Cutout: 4.25 inch. IC Rated: suitable for direct contact with insulation. Ocularc includes a color-select switch which allows user to field select between 2700K, 3000K, 3500K, 4000K and 5000K color temperature options. Includes TIR lens. TRIAC and ELV dimming at 120V. 0-10V dimming at 277V. NOTE: Sold as new construction, but may be reconfigured in the field for remodel.

### Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	13W
DIMMER	Low Voltage Electronic
DIMENSIONS	4.75"W x 3.88"H
INTEGRATED LED MODULE	1 x LED/13W/120-277V LED


### Technical Information

APERTURE SHAPE	Round
HOUSING HEIGHT	4"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Downlight
LAMP LIFE	50000 hours
BEAM ANGLE	18°
COLOR RENDERING	90 CRI
LAMP COLOR	CCT Select
LUMENS/WATT	80.00
LUMINOUS FLUX	1040 lumens



Shown in white

Sold as New Construction, may be reconfigured in the field for Remodel

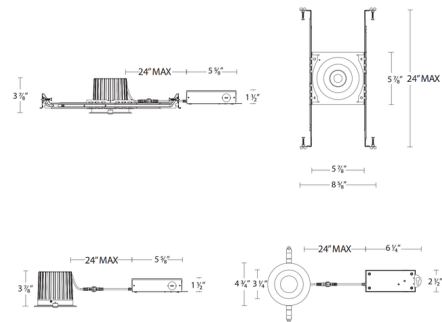

CLICK TO VIEW PRODUCT

Notes: