

# Lightology

lightology.com  
866-954-4489  
04-05-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **CSL1429328**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Eco 3IN Adjustable Shallow IC Housing By CSL



### Description


The ECO 3 Inch Shallow Adjustable IC Housing is ready to install into 2.5 inch shallow plenums in drywall or T-bar grid ceilings with IC, Airtight and Chicago Plenum certifications. Features a 120/277V Universal driver offering 1%-100% TRIAC/ELV/0-10V dimming. Available in 2700K or 3000K color temperature options and Warm Dim (3000K-1800K) which visually warms the space as the lights are dimmed. ECO 3 includes a fixed 50 degree optic for general task and accent lighting with minimal glare. Insert up to two lenses for additional light control, sold separately. ECO 3 pairs with a variety of trim styles and colors (round and square, with flange and flangeless) for a clean ceiling aesthetic. Rated for wet locations when used with a wet location trim. Warm Dim with 10, 30, or 50 degree optic requires an MP (Solite Lens); Warm Dim with 80 degree optic requires an FR (Frosted Lens), sold separately. Note: A complete fixture requires a housing, trim, (and mud-in plate for flangeless), sold separately. TRIAC/ELV dimming only at 120V.

### Specifications


COLOR	N/A
BODY FINISH	Matte Black
WATTAGE	11.4W
DIMMER	Universal
DIMENSIONS	14.38"W x 2.5"H x 8.63"D
INTEGRATED LED MODULE	1 x LED/11.4W/120-277V LED
COUNTRY OF ORIGIN	Thailand

### Technical Information

HOUSING HEIGHT	2.5"
HOUSING TYPE	New construction IC
FUNCTION	Adjustable Accent
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	107.02
LUMINOUS FLUX	1220 lumens

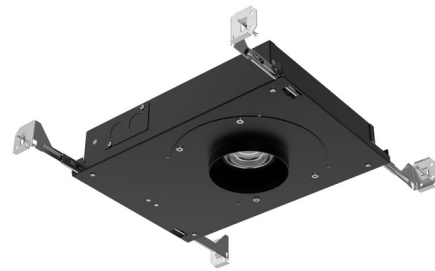

Shown in matte black

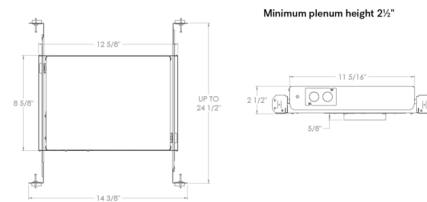

CLICK TO VIEW PRODUCT

Notes: