

Lightology

lightology.com
866-954-4489
04-21-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **CSL1429340**
 Approved On: _____ Approved By: _____

Eco 3IN Shallow IC Wet Location Downlight with Round Trim

By CSL



Description


The ECO 3 Inch Shallow IC Wet Location Downlight with Round Trim is ready to install into 2.5 inch shallow plenums in drywall or T-bar grid ceilings with IC, Airtight and Chicago Plenum certifications. Features a 120/277V Universal driver offering 1%-100% TRIAC/ELV/0-10V dimming. This fixture includes a flanged trim for a neat, transitional aesthetic. ECO 3 includes a fixed 50 degree optic for general task and accent lighting with minimal glare. Insert up to two lenses for additional light control, sold separately. Note: TRIAC/ELV dimming only at 120V.

Specifications



COLOR	N/A
BODY FINISH	White
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.63"W x 2.5"H
INTEGRATED LED MODULE	1 x LED/12W/120V LED
COUNTRY OF ORIGIN	Thailand

Technical Information

APERTURE SHAPE	Round
HOUSING HEIGHT	2.5"
HOUSING TYPE	New construction IC
CEILING TYPE	Drywall with Trim
FUNCTION	Downlight
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	101.67
LUMINOUS FLUX	1220 lumens

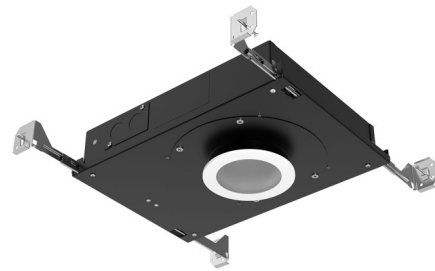

Shown in white

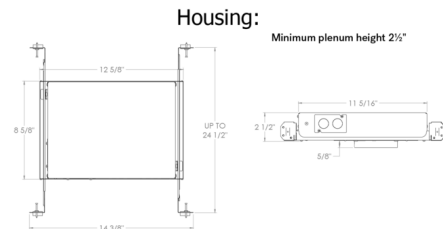

CLICK TO VIEW PRODUCT

Notes: