Lightology

lightology.com
866-954-4489
11-08-26

Project:

Company:

Location: Fixture Type:

SPEC #: **CSL1429340**


Approved On: Approved By:

Eco 3IN Shallow IC Wet Location Downlight with Round Trim


By CSL

Description

The ECO 3 Inch Shallow IC Wet Location Downlight with Round Trim is ready to install into 2.5 inch shallow plenums in drywall or T-bar grid ceilings with IC, Airtight and Chicago Plenum certifications. Features a 120/277V Universal driver offering 1%-100% TRIAC/ELV/0-10V dimming. This fixture includes a flanged trim for a neat, transitional aesthetic.ECO 3 includes a fixed 50 degree optic for general task and accent lighting with minimal glare. Insert up to two lenses for additional light control, sold separately.Note: TRIAC/ELV dimming only at 120V.

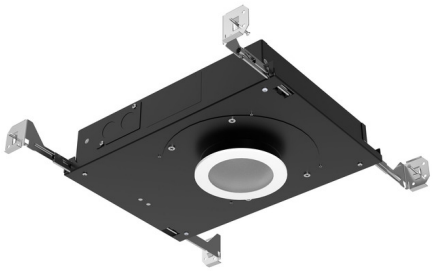

Shown in white

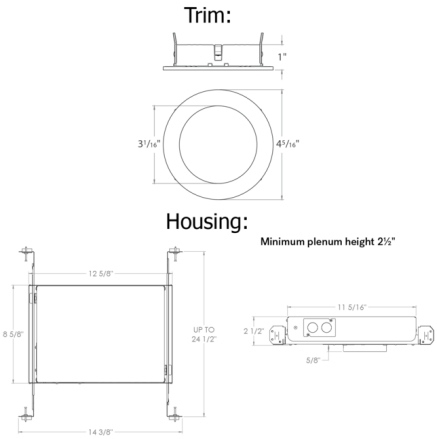

Specifications

COLOR	N/A
BODY FINISH	White
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.63"W x 2.5"H
INTEGRATED LED MODULE	1 x LED/12W/120V LED
COUNTRY OF ORIGIN	Thailand

Technical Information

APERTURE SHAPE	Round
HOUSING HEIGHT	2.5"
HOUSING TYPE	New construction IC
CEILING TYPE	Drywall with Trim
FUNCTION	Downlight
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	101.67
LUMINOUS FLUX	1220 lumens

CLICK TO VIEW PRODUCT

Notes: