

# Lightology

lightology.com  
866-954-4489  
02-12-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG1440076**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Flex Neon LRF7 Outdoor TruColor RGBTW Left/Right Bend 24V

By PureEdge Lighting



WIZ



### Description


Flex Neon LRF7 TruColor RGBTW bends left to right or right to left with a 0.7 inch wide flat lens offering superior color rendering while creating uniform illumination without visible dots. Sold as 5W5: 5 watts RGB and 5 watts Tunable White up to 20 feet; or 5W7: 5 watts RGB and 7 watts Tunable White up to 12 feet. Features E (end power input wire), CA (cap at end, no feed through), and W (outdoor wet location barrel connector cable leads) with an IP67 rating for outdoor wet locations. Pure Smart TruColor technology uses five channels of tunable LEDs, composed of RGBTW red, blue, green, and Tunable White (1500K-6500K), giving customers access to the warm glow of the sunset (1500K-2400K golden hour) to the pure white light of the mid-day sun (5700K) and everything in between. Flex Neon is offered with both indoor and wet-rated junction boxes (sold separately), which include a Pure Smart/WiZ Pro Bridgebox allowing for 5-Channel, full color, wireless control of the TruColor RGBTW Light Engine with the WiZ Pro Software Suite or Pure Smart Wi-Fi Room Controller (sold separately). System includes Outdoor 24VDC LED Flex Neon, End Cap, Power Connector (connected to each end of fixture), Wet Location Barrel Connectors, and Mounting Clips (provided with every two feet of Flex Neon). Note: System requires outdoor rated 24VDC RGBTW power supply for remote Bridgebox (PSBR-96W-24VDC), sold separately. Optional mounting accessories sold separately. Product is built to order.

### Specifications


COLOR . . . . . White  
BODY FINISH . . . . . N/A  
WATTAGE . . . . . 25W  
DIMMER . . . . . N/A  
DIMENSIONS . . . . . 60"L x 0.7"W x 0.75"H  
INTEGRATED LED MODULE . . . . . 5 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
BEAM ANGLE . . . . . 120°  
COLOR RENDERING . . . . . 96 CRI  
LAMP COLOR . . . . . RGB+White  
LUMENS/WATT . . . . . 162.00  
LUMINOUS FLUX . . . . . 810 lumens

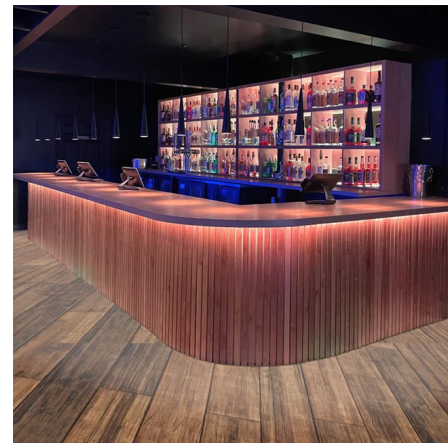

Shown in white

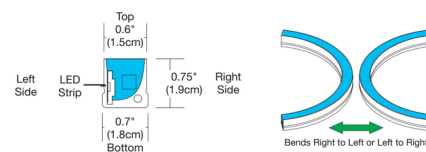

CLICK TO VIEW PRODUCT

Notes: