

Lightology

lightology.com
866-954-4489
04-25-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG1443001**
 Approved On: _____ Approved By: _____

Light Channel 0.6 Micro Grazer Tunable White Surface 24V

By PureEdge Lighting



Description

Light Channel .6 Micro Grazer Surface Mount Complete Fixture brings to life textural walls, panels, masonry, undulating tiles and so much more. The slim profile, made-to-order LED channel in Tunable White 2000K-6500K (2K6K) grants independent control and adjustment of color temperature and intensity from 2000K (Sunset) through 6500K (Day Light White). Tunable white lighting visually, biologically, and emotionally contributes to human interaction with the physical world, delivering a positive effect on human health, well-being, and performance. . Available in 12 inch increments up to 120 inch with a linear frosted 20 degree lens or clear 7 degree lens. Fixture includes: Light Channel .6 Surface Mount Micro Grazer, Light Channel .6 Micro Grazer Assembly, 24V LED Strip, Lens, 72 Inch Light Channel Power Connector, Mounting Clips (included with every 2 feet of channel), End Caps, and End Cap Covers. A DMX 2XK color changing power supply or 2XK 2-channel 0-10V power supply is required and sold separately. 0-10V power supply requires two dimmers --one for intensity and one for color temperature. DMX power supply must be used with PureEdge CDMX controller.

Specifications


COLOR	Linear Frosted Lens
BODY FINISH	Satin Aluminum
WATTAGE	5W
DIMMER	N/A
DIMENSIONS	12"L x 0.7"W x 0.61"H
INTEGRATED LED MODULE	1 x LED/5W/24V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	91 CRI
LAMP COLOR	2000K-6000K Tunable White
LUMENS/WATT	58.80
LUMINOUS FLUX	294 lumens



Shown in satin aluminum / linear frosted lens

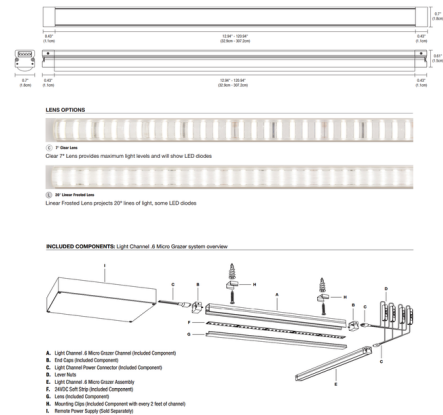

CLICK TO VIEW PRODUCT

Notes: