

Lightology

lightology.com
866-954-4489
04-24-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG145995**
 Approved On: _____ Approved By: _____

Kurve Display Sign with Feed Thru Stem By PureEdge Lighting



Description

Kurve Display Sign Light features a lambertian white diffuser that provides uniform light without hotspots and a special Feed Thru Stem for floating signs. At 7.5 watts per foot, the 24 volt DC channel fixture is available in 12 inch increments up to 120 inches. Available in a variety of color temperature in Satin Nickel or Black finish in 12 inch increments up to 120 inches. Arm extends 14 inches from wall. Hinges on the fixture arm rotates up to 90 degrees (from facing the wall to straight down). Can be powered using a 60 watt electronic low voltage (ELV) power supply (PS-60L-ELV) that fits inside junction box, or a Universal (UNI) power supply that requires a remote installation, sold separately. Universal power supply dimmable with electronic low voltage (ELV), Triac or 0-10V dimmer, sold separately. ETL listed. Major components made and assembled in the USA. Fixture includes a 5 year warranty. Product is built to order. Note: Required power supply and dimmer control sold separately.

Specifications


COLOR	N/A
BODY FINISH	Satin Nickel
WATTAGE	7.5W
DIMMER	Low Voltage Electronic
DIMENSIONS	12"L x 1.5"W x 1.4"H x 14"D
INTEGRATED LED MODULE	1 x LED/7.5W/24V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	2700K
LUMENS/WATT	36.00
LUMINOUS FLUX	270 lumens



Shown in satin nickel

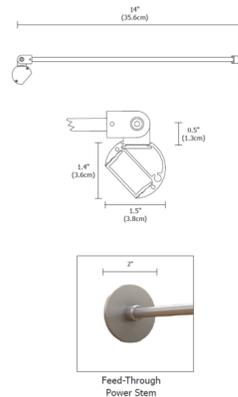

CLICK TO VIEW PRODUCT

Notes: