

Lightology

lightology.com
866-954-4489
05-25-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **GRC1464691**
 Approved On: _____ Approved By: _____

Minifit Adjustable Gimbal with External Driver - Overstock

By Green Creative



Description

The Minifit Adjustable Gimbal with External Driver is an IC and Air-tight fixture designed for new and remodel construction shallow plenum applications including soffits, bulkheads and casework. Die cast aluminum optical assembly with polycarbonate lens fits in a spun aluminum trim for a clean look. Fixture can rotate 360 degrees and tilts up to 30 degrees. 38 degree flood beam angle. Fixture installs and is accessible from below the ceiling. Plenum rated quick connect cable allows for easy wiring. Spring clips accommodate ceiling thickness between .50 to 2 inch. Includes 120 volt external driver, dimmable to 10% with TRIAC and ELV. Note: Minifit can be used for new construction applications with new construction mounting plate accessory, sold separately.

Specifications


COLOR	N/A
BODY FINISH	White
WATTAGE	5W
DIMMER	Low Voltage Electronic
DIMENSIONS	2.5"W x 1.63"H
INTEGRATED LED MODULE	1 x LED/5W/120V LED

Technical Information

APERTURE SIZE	1.880"
APERTURE SHAPE	Round
HOUSING HEIGHT	2"
HOUSING TYPE	Remodel IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	38°
COLOR RENDERING	90 CRI
LAMP COLOR	3000K
LUMENS/WATT	70.00
LUMINOUS FLUX	350 lumens



Shown in white

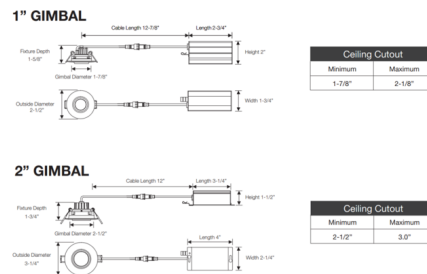

CLICK TO VIEW PRODUCT

Notes: