

# Lightology

lightology.com  
866-954-4489  
06-04-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG1485948**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Verge Ceiling Static White Drywall Plaster-In System 24V By PureEdge Lighting



### Description

Verge Ceiling features an innovative design that recesses within 5/8 inch drywall without joist modification. Available in 1 foot increments (sold in 5 foot increments) up to 40 feet (2 Watt), 20 feet (5 Watt), and 12 feet (7 Watt) and is field-cuttable. The plaster-in aluminum extrusion features a 4 inch paintable backer plate and highlights ceiling perimeters while emitting smooth and continuous ambient illumination. Included Components: Junction Box, Adjustable Mounting Bars, Backer Plate, Verge Ceiling Channel(s), Drywall Screws, LED Soft Strip and Lens(es). System requires a remote Universal (UNI) power supply. A VG-1RE-JBOX rough-in junction box is available to rough-in electrical before drywall installation (included and sold separately). Product is built to order. Note: Required power supply, dimmer control, and optional mounting accessories sold separately. **MAXIMUM LENGTHS BEFORE RE-FEEDING:** 2WDC, 2.5 watts per foot - 40 Feet 5WDC, 4.4 watts per foot - 20 Feet 7WDC, 7.5 watts per foot - 12 Feet

### Specifications


COLOR	N/A
BODY FINISH	White
WATTAGE	10W
DIMMER	Low Voltage Electronic
DIMENSIONS	60"L x 0.88"W x 0.75"H
INTEGRATED LED MODULE	5 x LED/2W/24V LED

### Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	92 CRI
LAMP COLOR	2700K
LUMENS/WATT	235.00
LUMINOUS FLUX	470 lumens



Shown in white

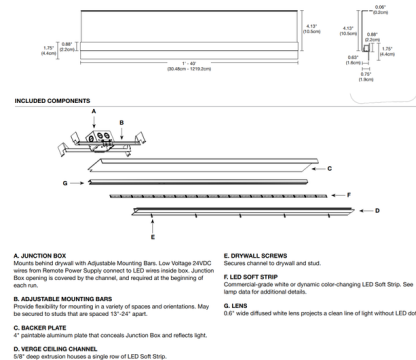

CLICK TO VIEW PRODUCT

Notes: