

Lightology

lightology.com
866-954-4489
07-10-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **EDG1486124**

Approved On: _____ Approved By: _____


Verge Ceiling Warm Dim Drywall Plaster-In System 24V

By PureEdge Lighting



Description

Verge Ceiling features an innovative design that recesses within 5/8 inch drywall without joist modification. The plaster-in aluminum extrusion features a 4 inch paintable backer plate and highlights ceiling perimeters while emitting smooth and continuous ambient illumination. Available in 1 foot increments (sold in 5 foot increments) up to 20 feet and is field-cuttable. Includes 5 LED watt per foot of Warm Dim 27D (2700K-2200K) or 30D (3000K-2200K) color temperature LED Soft Strip. Included Components: Junction Box, Adjustable Mounting Bars, Backer Plate, Verge Ceiling Channel(s), Drywall Screws, LED Soft Strip and Lens(es). A VG-1RE-JBOX rough-in junction box is available to rough-in electrical before drywall installation (included and sold separately). System requires a remote Universal (UNI) power supply, sold separately. Product is built to order. Note: Required power supply, dimmer control, and optional mounting accessories sold separately.

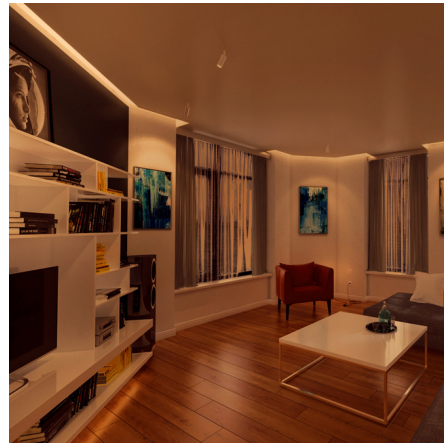

Shown in white

Specifications

COLOR	N/A
BODY FINISH	White
WATTAGE	25W
DIMMER	Low Voltage Electronic
DIMENSIONS	60"L x 0.88"W x 0.75"H
INTEGRATED LED MODULE	5 x LED/5W/24V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	.94 CRI
LAMP COLOR	2700K Warm Dim
LUMENS/WATT	181.00
LUMINOUS FLUX	905 lumens



CLICK TO VIEW PRODUCT

Notes: