Lightology

lightology.com
866-954-4489
10-31-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EDG1530596**

Approved On: Approved By:

Verge Wall Tunable White Plaster-In LED System


By PureEdge Lighting

Description


Verge Wall Tunable White is a slim, plaster-in aluminum channel with 4 inch paintable aluminum backer plate. Verge Wall creates and highlights the transition space where two drywall surfaces join together while emitting ambient illumination. Available in 2W (2.5 watts up to 50 feet), 5W (4.4 watts up to 20 feet), and 7W (7.5 watts up to 12 feet) and may be field cut to any length. Tunable White 2K6K (2000K-6500K) color temperature grants independent control and adjustment of color temperature and intensity from 2000K (sunset) through 6500K (daylight white). Note: A DMX color changing power supply or 2XK 0-10V 2-Channel power supply is required and sold separately. 0-10V requires two dimmers --one for intensity and one for color temperature. DMX power supply must be used with PureEdge controller (CDMX1-2XK). Included Components: Junction Box with Adjustable Mounting Bars, Backer Plate, Verge Wall Channel(s), Drywall Screws, LED Strip, and Lens(es).



Shown in white



MAXIMUM LENGTHS BEFORE RE-FEEDING
- 2WDC, 2.5 watts per foot - 40'
- 5WDC, 4.4 watts per foot - 20'
- 7WDC, 7.5 watts per foot - 12'

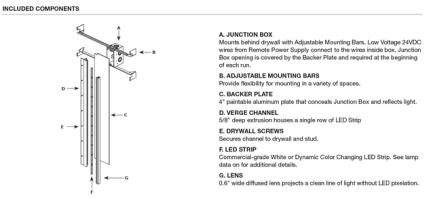

Specifications

COLOR	N/A
BODY FINISH	White
WATTAGE	10W
DIMMER	N/A
DIMENSIONS	60"L x 1.75"W x 4"H
INTEGRATED LED MODULE	5 x LED/2W/24V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	91 CRI
LAMP COLOR	2000K-6000K Tunable White
LUMENS/WATT	150.00
LUMINOUS FLUX	300 lumens

CLICK TO VIEW PRODUCT

Notes: