

# Lightology

lightology.com  
866-954-4489  
04-25-26

Project: \_\_\_\_\_

Company: \_\_\_\_\_

Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_

SPEC #: **EDG160177**


Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## 75W 24V AC Class 2 LED Power Supply By PureEdge Lighting



### Description

TE-75L-24 24 Volt AC Electronic Class 2 remote transformer is used to power 24 Volt AC lighting systems. No load technology works with both Halogen and LED AC loads. Auto-reset, Short circuit, Overload and Thermal protection. Soft Start and Dimmable with a Low Voltage Electronic dimmer. Low profile, small compact design to fit in most enclosures. Isolated output power per NEC and UL safety requirements. Input voltage 120V AC 50/60Hz. Output Voltage 24V AC. UL, CUL, RoHS and CE complaint.

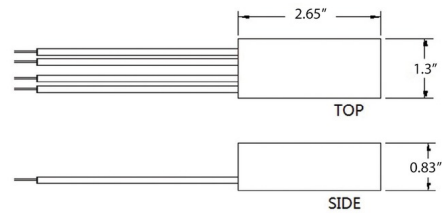

Shown in black

### Specifications

COLOR	N/A
BODY FINISH	Black
WATTAGE	75W
DIMMER	Low Voltage Electronic
DIMENSIONS	2.65"L x 1.3"W x 0.83"H
BULB	N/A



CLICK TO VIEW PRODUCT

Notes: