



BRAND

Contrast Lighting

DESCRIPTION

Concerto LED 4 Inch 0-10 Dim 1500 Lumen Performance 1 Non-IC Remodel Housing is made of galvanized steel and aluminum to optimize heat dissipation. Below ceiling accessible. Non-IC designation indicates that insulation must be kept a minimum of 3 inches away from housing. Housing requires a 7 inch minimum clearance beyond ceiling level. No light leakage. Thermal protection: 65 degrees C. Can fit ceilings up to 7/8 inch thick. Ceiling cutout: 4.25 inch. Dimmable with a 0-10 volt dimmer per attached Concerto 4 Inch Performance 1 housings, 0-10 dimmer compatibility outline. UL listed for damp and wet locations. 5 year warranty on LED driver. Dimensions: 13.5 inch width x 5.2 inch depth x 5.5 inch height. A complete fixture consists of a housing and trim, sold separately.





TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	16W
DIMMER	0-10V
DIMENSIONS	13.5"W x 5.5"H x 5.2"D
INTEGRATED LED MODULE	
LAMP	1 x LED/120V LED

Technical Information

LUMINOUS FLUX	1500 lumens
LUMENS/WATT	93.75
CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC

SPEC #	CLT234228
--------	-----------

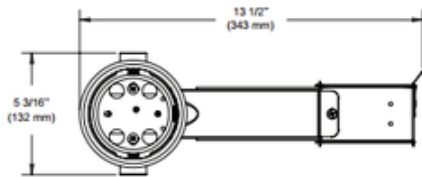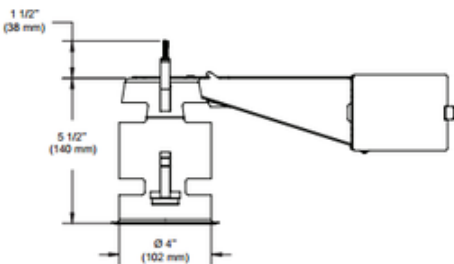

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE