



**BRAND**

Contrast Lighting

**DESCRIPTION**

Concerto LED 4 Inch 0-10 Dim 2000 Lumen Performance 2 Non-IC Remodel Housing is made of galvanized steel and aluminum to optimize heat dissipation. Below ceiling accessible. Non-IC designation indicates that insulation must be kept a minimum of 3 inches away from housing. Housing requires a 7 inch minimum clearance beyond ceiling level. No light leakage. Thermal protection: 80 degrees C. Can fit ceilings up to 7/8 inch thick. Ceiling cutout: 4.25 inch. Dimmable with a 0-10 volt dimmer per attached Concerto 4 Inch Performance 2 housings, 0-10 dimmer compatibility outline. UL listed for damp and wet locations. 5 year warranty on LED driver. Dimensions: 13.5 inch width x 5.2 inch depth x 5.5 inch height. A complete fixture consists of a housing and trim, sold separately.





|                              |                        |
|------------------------------|------------------------|
| <b>TRIM COLOR</b>            | N/A                    |
| <b>BODY FINISH</b>           | Galvanized Steel       |
| <b>WATTAGE</b>               | 23W                    |
| <b>DIMMER</b>                | 0-10V                  |
| <b>DIMENSIONS</b>            | 13.5"W x 5.5"H x 5.2"D |
| <b>INTEGRATED LED MODULE</b> |                        |
| <b>LAMP</b>                  | 1 x LED/23W/120V LED   |

*Technical Information*

|                      |                   |
|----------------------|-------------------|
| <b>LUMINOUS FLUX</b> | 2000 lumens       |
| <b>LUMENS/WATT</b>   | 86.96             |
| <b>CEILING TYPE</b>  | Drywall with Trim |
| <b>HOUSING TYPE</b>  | Remodel NON IC    |

**SPEC #** CLT234229

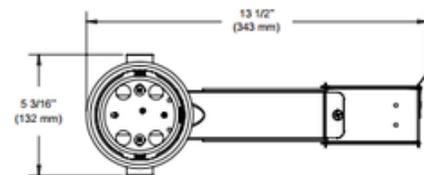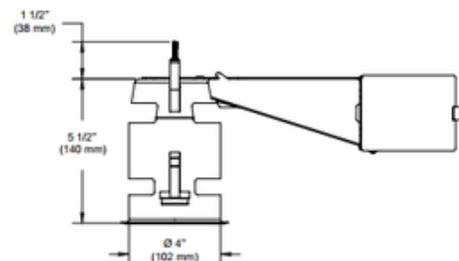

| COMPANY | PROJECT | FIXTURE TYPE | APPROVED BY | DATE |
|---------|---------|--------------|-------------|------|
|         |         |              |             |      |