




**BRAND**

Contrast Lighting

**DESCRIPTION**

The Concerto 3.5 Inch 120 Volt New Construction Non-IC Housing is available in a Performance 1 and Performance 2 option. Non-IC designation requires a 3 inch minimum clearance away from housing. Cutout diameter: 3 5/8 inch. Can fit ceilings up to 1.5 inch thick. Dual voltage 120V/277V (Performance 1 (16 watts/up to 1500 lumens) or Performance 2 (23 watts/up to 2000 lumens). UL listed for damp and wet locations. Dimmable with a 0-10V dimmer (see attached manufacturer reference for dimmer compatibility). A complete fixture includes a housing and trim, sold separately.


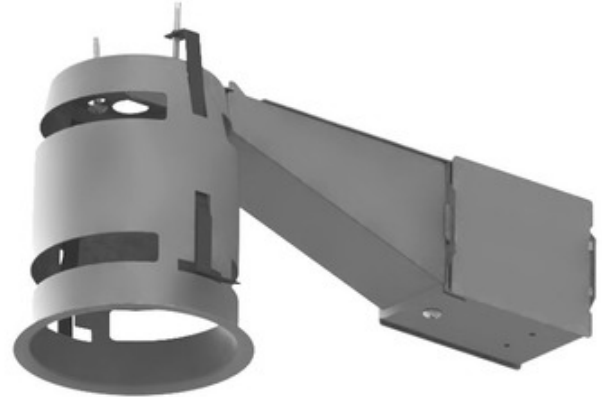


<b>TRIM COLOR</b>	N/A
<b>BODY FINISH</b>	Galvanized Steel
<b>WATTAGE</b>	16W
<b>DIMMER</b>	0-10V
<b>DIMENSIONS</b>	13"W x 5.5"H x 4.63"D
<b>INTEGRATED LED MODULE</b>	
<b>LAMP</b>	1 x LED/16W/120V LED

*Technical Information*

<b>LUMINOUS FLUX</b>	1500 lumens
<b>LUMENS/WATT</b>	93.75
<b>CEILING TYPE</b>	Drywall with Trim
<b>HOUSING TYPE</b>	Remodel IC

**SPEC #** CLT234233

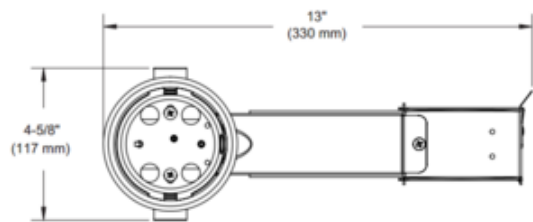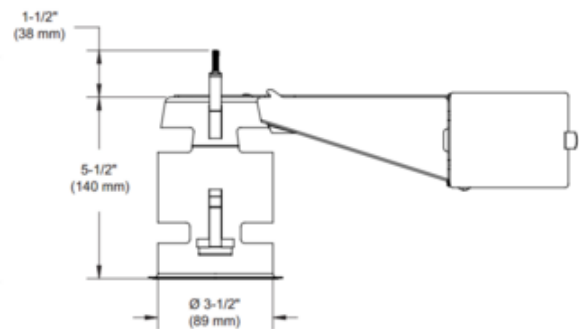

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE