



BRAND

Contrast Lighting

DESCRIPTION

Concerto 4 Inch 0-10 Dim 2000 Lumen Performance 2 LED Non-IC New Construction Housing is made of galvanized steel with a thickness up to 18 gauge. Below ceiling accessible. Non-IC designation indicates that insulation must be kept a minimum of 3 inches away from housing. Can fit in ceilings up to 1.5 inch thick. No light leakage. Contrast hooks for ease of installation and a perfect fit to ceiling. Mounting bars extend from 10 to 24.5 inches to fit in most ceiling structures. Thermal protection: 80 degrees C. Ceiling cutout: 4.25 inch. Dimmable with a 0-10 volt dimmer per attached manufacturer dimmer compatibility outline for 4 Inch Performance 2 housings, 0-10 dimming. UL listed for damp and wet locations. 5 year warranty on LED driver. Dimensions: 13.5 inch width x 7.4 inch depth x 5.5 inch height. A complete fixture includes a housing and trim, sold separately.





Shown in: Galvanized Steel

TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
LAMP	1 x LED/23W/120V LED
WATTAGE	23W
DIMMER	0-10V
DIMENSIONS	13.5"W x 5.5"H x 7.4"D

Technical Information

LUMINOUS FLUX	2000 lumens
LUMENS/WATT	86.96
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
HOUSING HEIGHT	6"

ITEM NUMBER CLT234240

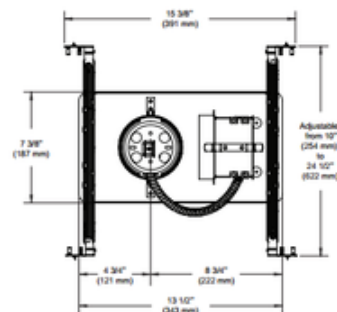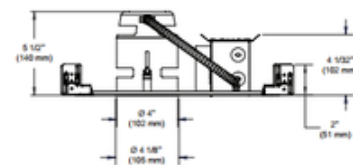

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE