




BRAND

Contrast Lighting

DESCRIPTION

The Concerto 3.5 Inch 120 Volt New Construction Non-IC Housing is available in a Performance 1 and Performance 2 option. Non-IC designation requires a 3 inch minimum clearance away from housing. Cutout diameter: 3 5/8 inch. Can fit ceilings up to 1.5 inch thick. Dual voltage 120V/277V housing (Performance 1 (16 watts/up to 1500 lumens) or Performance 2 (23 watts/up to 2000 lumens). UL listed for damp and wet locations. Dimmable with a 0-10V dimmer (see attached manufacturer reference for dimmer compatibility). A complete fixture includes a housing and trim, sold separately.

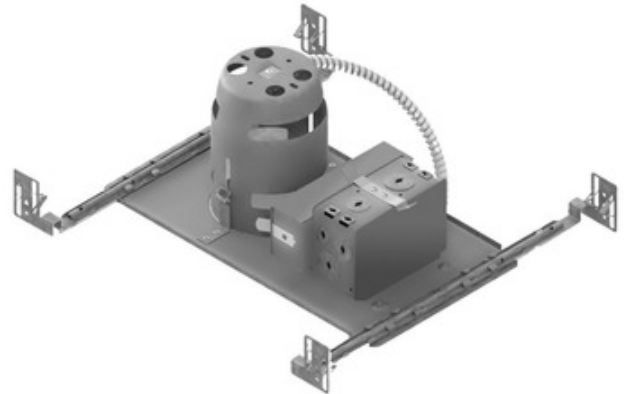



Shown in: Galvanized Steel

TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	16W
DIMMER	0-10V
DIMENSIONS	13.5"W x 5.5"H x 7.4"D
LAMP	1 x LED/16W/120V LED

Technical Information

LUMINOUS FLUX	1500 lumens
LUMENS/WATT	93.75
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
HOUSING HEIGHT	6"

ITEM NUMBER CLT234247

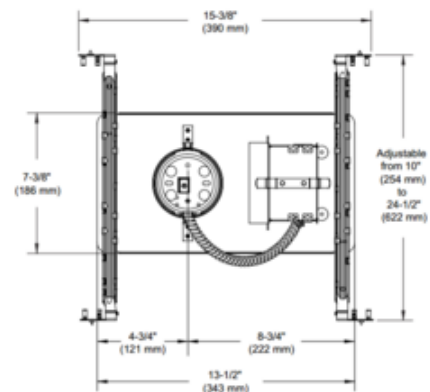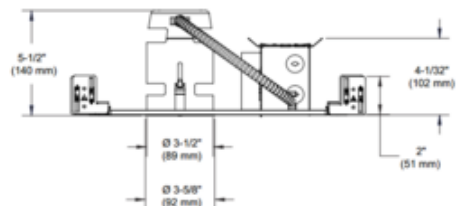

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE