



BRAND

Contrast Lighting

DESCRIPTION

Concerto 4 Inch 0-10 Dim 1500 Lumen Performance 1 LED IC New Construction Housing is made of galvanized steel with a thickness up to 18 gauge. Below ceiling accessible. IC designation indicates that housing can be in direct contact with insulation, except polyurethane. Can fit in ceilings up to 1.5 inch thick. No light leakage. Mounting bars extend from 10 to 24.5 inches to fit in most ceiling structures. Ceiling cutout: 4.25 inch. Dimmable with a 0-10 volt dimmer per attached 4 Inch Concerto Performance 1 housings, 0-10 dimming outline. UL listed for damp and wet locations. 5 year warranty on LED driver. Dimensions: 19.5 inch width x 10 inch depth x 7.1 inch height. A complete fixture consists of a housing and trim, sold separately.





TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	16W
DIMMER	0-10V
DIMENSIONS	19.5"W x 7.1"H x 10"D
INTEGRATED LED MODULE	
LAMP	1 x LED/16W/120V LED

Technical Information

LUMINOUS FLUX	1500 lumens
LUMENS/WATT	93.75
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction IC

SPEC # CLT234257

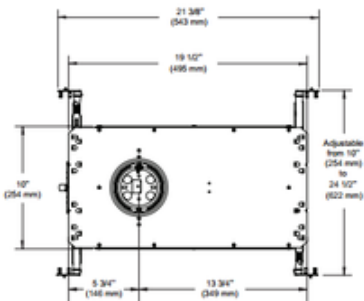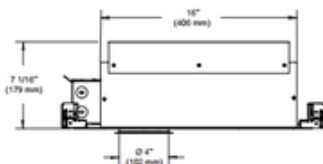

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE