



**BRAND**

Contrast Lighting

**DESCRIPTION**

The Concerto 3.5 Inch 120 Volt New Construction Non-IC Housing is available in a Performance 1 and Performance 2 option. Non-IC designation requires a 3 inch minimum clearance away from housing. Cutout diameter: 3 5/8 inch. Can fit ceilings up to 1.5 inch thick. Dual Voltage 120V/277V housing (Performance 1 (16 watts/up to 1500 lumens) or Performance 2 (23 watts/up to 2000 lumens). UL listed for damp and wet locations. Dimmable with a 0-10V dimmer (see attached manufacturer reference for dimmer compatibility). A complete fixture includes a housing and trim, sold separately.





*Shown in: Galvanized Steel*

|                    |                       |
|--------------------|-----------------------|
| <b>TRIM COLOR</b>  | N/A                   |
| <b>BODY FINISH</b> | Galvanized Steel      |
| <b>LAMP</b>        | 1 x LED/16W/120V LED  |
| <b>WATTAGE</b>     | 16W                   |
| <b>DIMMER</b>      | 0-10V                 |
| <b>DIMENSIONS</b>  | 19.5"W x 7.1"H x 10"D |

*Technical Information*

|                       |                     |
|-----------------------|---------------------|
| <b>LUMINOUS FLUX</b>  | 1500 lumens         |
| <b>LUMENS/WATT</b>    | 93.75               |
| <b>CEILING TYPE</b>   | Drywall with Trim   |
| <b>HOUSING TYPE</b>   | New construction IC |
| <b>HOUSING HEIGHT</b> | 7"                  |

**PRODUCT NUMBER** CLT234269

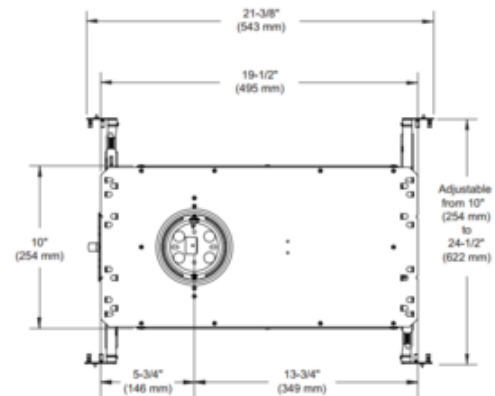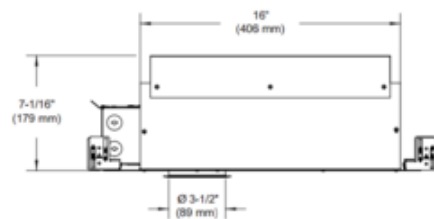

| COMPANY | PROJECT | FIXTURE TYPE | APPROVED BY | DATE |
|---------|---------|--------------|-------------|------|
|         |         |              |             |      |