



**BRAND**

Juno Lighting

**DESCRIPTION**

Aculux 3.25 Inch IC Air-Loc New Construction Housing is made of steel and aluminum in a painted Black finish. IC designation allows for housing to be completely covered with insulation. Accommodates 1/2 to 7/8 inch ceiling thickness. Features 370 degree rotation and 40 degree tilt with the simple twist of a screwdriver. Optimized center lamp beam optics translates lamp forward as it is aimed off nadir, insuring maximum light and low brightness. Black aiming mechanism and shield prevents visibility into fixture and preserves dark aperture. One 120 volt, 60 watt PAR16 or 50 watt PAR20 medium base halogen or LED equivalent is required, but not included. Lamp type/wattage dependent upon housing/trim combination (see attached Juno manufacturer specification). Halogen dimmable with a standard incandescent dimmer. Consult lamp manufacturer regarding dimmer compatibility when using LED equivalent lamps. UL listed for through-branch wiring and damp locations. Wet location listed with specific trims. 19.6 inch length x 13.75 inch width x 8.9 inch height. A complete fixture includes a housing and trim, sold separately.




<b>TRIM COLOR</b>	N/A
<b>BODY FINISH</b>	Black
<b>WATTAGE</b>	60W
<b>DIMMER</b>	Dimmable
<b>DIMENSIONS</b>	19.6"L x 13.75"W x 8.9"H
<b>BULB NOT INCLUDED</b>	
<b>LAMP</b>	1 x PAR16/Medium (E26)/60W/120V Halogen 1 x PAR16/Medium (E26)/120V LED 1 x PAR20/Medium (E26)/120V Halogen 1 x PAR20/Medium (E26)/120V LED

*Technical Information*

<b>CEILING TYPE</b>	Drywall with Trim
<b>HOUSING TYPE</b>	New construction IC
<b>HOUSING HEIGHT</b>	9"
<b>APERTURE SHAPE</b>	Round

**SPEC #** JUN25873

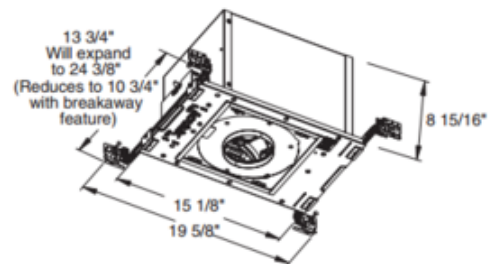

**4 1/4" CEILING CUTOUT  
(4 3/8" FOR FLUSH MOUNT)**

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE