



BRAND Contrast Lighting

DESCRIPTION

NW2000T 4 Inch IC Airtight New Construction Housing is designed for insulated airtight new construction applications. Takes up to 1.5 inch ceiling thickness. Below ceiling accessible. One 9.8 watt, 120 volt GU10 MR16 bulb is required, but not included. See attached manufacturer dimmer compatibility reference for dimmer options. Suitable for damp locations. UL listed. 4.25 inch ceiling cut out. 15.38 inch length x 10 inch width x 4.5 inch height. A complete fixture includes a housing and trim, sold separately.





TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	9.8W
DIMMER	Low Voltage Electronic
DIMENSIONS	15.38"L x 10"W x 4.5"H
BULB NOT INCLUDED	
LAMP	1 x MR16/GU10/9.8W/120V LED

Technical Information

CEILING TYPE	Drywall Trimless/Flush
HOUSING TYPE	New construction IC Airtight
HOUSING HEIGHT	5"
APERTURE SIZE	4.000"

SPEC # CLT332163

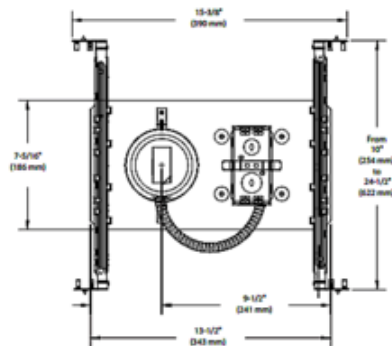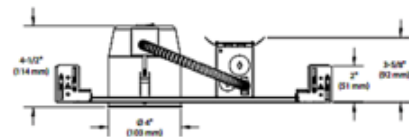

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE