



BRAND

Contrast Lighting

DESCRIPTION

Evolution Series NW3000T 3.5 Inch GU10 MR16 New Construction IC AirTight LED Housing is made of galvanized steel and approved for installation with direct contact to insulating material (except polyurethane). Below ceiling accessible. Can fit in ceilings up to 1.5 inch thick. One 120 volt, 10 watt GU10 base MR16 lamp is required, but not included. UL listed. Suitable for damp locations. Cutout diameter 3.625 inch. Housing dimensions: 3.5 inch diameter. 13.5 inch length x 7.3 inch depth x 4.5 inch height. A complete fixture consists of a housing and trim. Trim sold separately.





TRIM COLOR	N/A
BODY FINISH	N/A
WATTAGE	10W
DIMMER	Low Voltage Electronic
DIMENSIONS	13.5"L x 7.3"W x 4.5"H
BULB NOT INCLUDED	
LAMP	1 x MR16/GU10/10W/120V LED

Technical Information

FUNCTION	Downlight
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction IC Airtight
HOUSING HEIGHT	5"

SPEC #

CLT332165

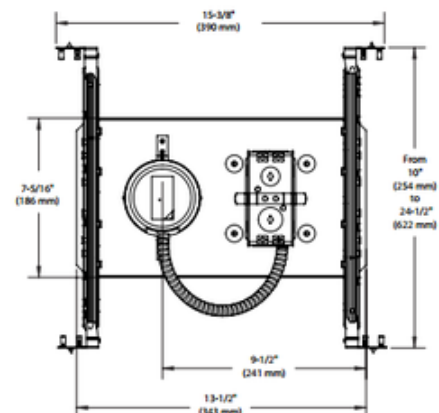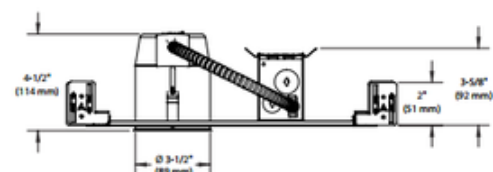

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE