



DESIGNER


Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

Aurora 3.3 Inch Aperture Round Edge RGB Color Changing (Red-Blue-Green) Trimless Downlight with Housing is a specification grade, recessed adjustable accent fixture for plaster or drywall construction. Features a flush mounted rigid plaster plate, which is finished into the ceiling, maintains a flat finish. Uplighting the RGB LEDs within the Aurora dome creates color at the ceiling plane while an LED white light projects downward, resulting in an optical illusion. Combining the knife edge 3.3 inch aperture with the Aurora dome and tilt gear hidden behind the lamp creates a clean internal look. LEDs may be controlled to be static color, cross-faded, or set to the beat of music. Fixture offers hot aiming with 0 to 45 degree vertical adjustment and 362 degree horizontal rotation without beam clipping. Precision machined gear adjustment is concealed behind the lamp. Features self locking tilt and manual locking horizontal rotation. Includes machined aluminum snoot to control internal light spill. The snoot secures the lamp to the pan tilt mechanism and allows for easy relamping. Housing is made of die formed aluminum and includes one 12 volt 15 watt electronic low voltage transformer for MR16 LED. LED driver/power data supply (PDS) and RGB LED modules are integral and serviceable through the aperture. RGB LEDs may be programmed as desired using a power supply with a DMX signal, sold separately. Compatible with Pure Lighting CDP and CTP controllers, sold separately. Housing is IC and Air-Tight, suitable for remodel or new construction. Dome features a highly reflective white painted finish which blends the colors of RGB LEDs. Dome hides electrical hardware and tilts for easy access to junction box and transformer. RGB high output LEDs are included. One 12 volt MR16 LED 7-9 watt bulb, equivalent to a 50 or 65 watt halogen, is required, but sold separately. Only use LED retrofit lamps designed for use in enclosed fixtures. Compatible with most electronic low voltage dimmers. Refer to attached spec for list of compatible LED MR16 bulbs and dimmers. ETL listed. Title 24 compliant when used with Vivid 3 7.5 watt MR16 LED from Soraa, sold separately. Housing: 14.75 inch length x 12.1 inch width x 5.75 inch height. Aurora Gear Cover accessory available, sold separately.

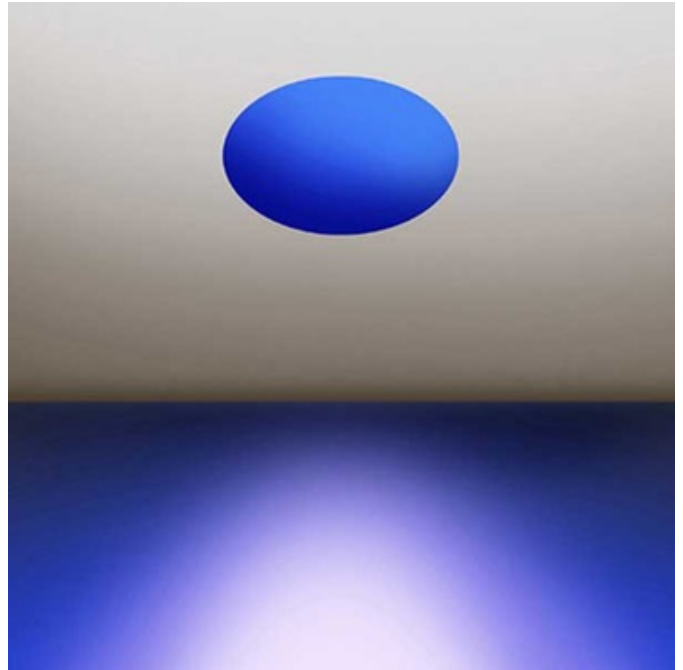


TRIM COLOR	N/A
BODY FINISH	Aluminum/ White Dome
WATTAGE	19W
DIMMER	N/A
DIMENSIONS	14.75"L x 12.1"W x 5.75"H
INTEGRATED LED MODULE	
LAMP	4 x LED/2.5W/120V LED 1 x MR16/GU5.3 (bipin)/9W/12V LED

Technical Information

FUNCTION	Adjustable Accent
CEILING TYPE	Drywall Trimless/Flush
HOUSING TYPE	New construction IC Airtight
HOUSING HEIGHT	6"
APERTURE SHAPE	Round

SPEC # EDG355868

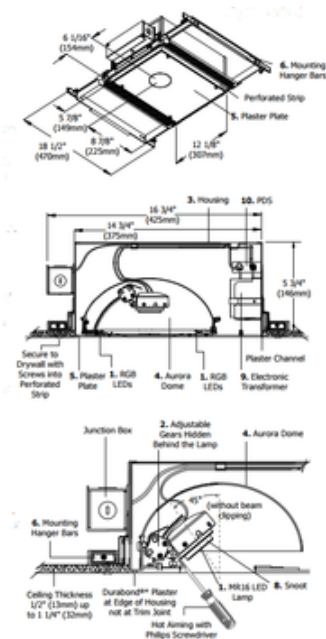

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE