



BRAND

Visual Comfort Architectural

DESCRIPTION

3 Inch Round 90CRI Fixed Downlight Non-IC Airtight, IC Airtight, or Chicago Plenum New Construction Housing for round flanged trims. Small aperture LED downlight with architectural appearance. Includes 12 or 17 watt LED module with choice of 2700K, 3000K or 3500K color temperature or Warm Dim (3000K-1800K) and 10, 18, 25, 40 or 60 degree beam angle options. 3 7/8 inch ceiling opening. Suitable for damp locations. Suitable for wet locations with shower trim option. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately. Note: Warm Dim option is not available with 10 degree beam angle.



IC AIRTM


Shown in: Black Powder Coat

TRIM COLOR	N/A
BODY FINISH	Black Powder Coat
WATTAGE	17W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.5"W x 4"H x 9.5"D
INTEGRATED LED MODULE	
LAMP	1 x LED/120-277V LED

Technical Information

LUMINOUS FLUX	1476 lumens
LUMENS/WATT	86.82
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	25°
LAMP LIFE	50000 hours
FUNCTION	Downlight
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction IC Airtight

SPEC #	ELE360847
--------	-----------

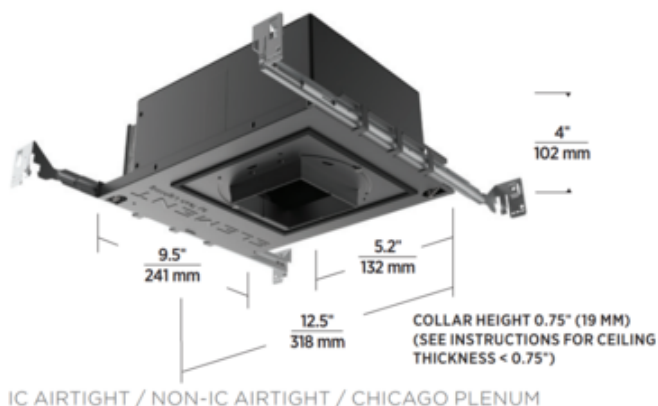

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE