



BRAND

PureEdge Lighting

DESCRIPTION

The PSB-3X100W-24VDC-RGB Class 2 LED Power Supply accepts input voltage in a range of 120-277 volts AC and outputs 24 volts DC power up to 3X100 watts. The integrated RGB driver receives signals from CDP, CTP, CDMX1-RGBW or CDMX1-2XK to control RGB color mixing and light intensity. Features short circuit and overload protection. For indoor applications only. To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location. Power Input: 120-277VAC, 50/60Hz. Power Output: Class 2, 24VDC, 3X4.16A, 3X100 watts maximum. Compatible Controllers: Touch Screen Controller with Power Supply (CTP), Color Dial Controller with Power Supply (CDP), DMX 1-Zone RGBW Touch Controller (CDMX1-RGBW), or Tunable White Touch Controller (CDMX1-2XK), sold separately. ETL listed. 17 inch width x 13 inch depth x 3 inch height.




Shown in: White


SHADE COLOR	N/A
BODY FINISH	White
WATTAGE	300W
DIMMER	Dimmable
DIMENSIONS	17"W x 13"H x 3"D
BULB NOT INCLUDED	
LAMP	N/A

SPEC #

EDG362722

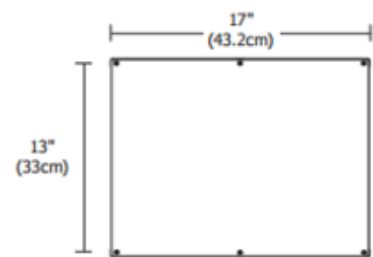

Top View

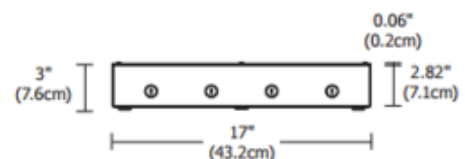

Side View

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE