

Lightology

lightology.com
866-954-4489
07-03-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **ELE364726**
 Approved On: _____ Approved By: _____

Element 3IN RD Flanged Downlight New Construction Housing By Visual Comfort Architectural



Description

3 Inch Round 90CRI Fixed Downlight Non-IC Airtight, IC Airtight, or Chicago Plenum New Construction Housing for round flanged trims. Small aperture LED downlight with architectural appearance. Includes 12 or 17 watt LED module with choice of 2700K, 3000K or 3500K color temperature or Warm Dim (3000K-1800K) and 10, 18, 25, 40 or 60 degree beam angle options. 3 7/8 inch ceiling opening. Suitable for damp locations. Suitable for wet locations with shower trim option. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately. Note: Warm Dim option is not available with 10 degree beam angle.

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black Powder Coat
WATTAGE	17W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.5"W x 4"H x 9.5"D
INTEGRATED LED MODULE	1 x LED/17W/120-277V LED


Technical Information

APERTURE SHAPE	Round
HOUSING HEIGHT	4"
HOUSING TYPE	New construction NON IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Downlight
LAMP LIFE	50000 hours
BEAM ANGLE	18°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	86.82
LUMINOUS FLUX	1476 lumens



IC AIRT

Shown in black powder coat

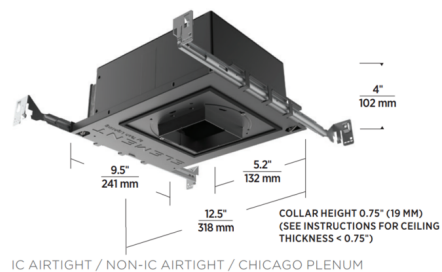

IC AIRTIGHT / NON-IC AIRTIGHT / CHICAGO PLENUM



CLICK TO VIEW PRODUCT

Notes: