

# Lightology

lightology.com  
866-954-4489  
04-22-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **ELE364816**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Element 3IN RD Flangeless Downlight New Construction Housing By Visual Comfort Architectural



### Description

3 Inch Round 90CRI Flangeless Fixed Downlight Non-IC Airtight, IC Airtight, or Chicago Plenum New Construction Housing for round flangeless trims is a small aperture LED downlight with architectural appearance. Includes 12 or 17 watt LED module in 2700K, 3000K or 3500K color temperature options or Warm Dim LED (3000K-1800K). Offered with a 10, 18, 25, 40 or 60 degree beam angle. 3 7/8 inch ceiling opening. Suitable for damp locations. Suitable for wet locations with shower trim option. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately. Note: Warm Dim option is not available with 10 degree beam angle.

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black Powder Coat
WATTAGE	17W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.5"L x 9.5"W x 4"H
INTEGRATED LED MODULE	1 x LED/17W/120-277V LED

### Technical Information

APERTURE SHAPE	Round
HOUSING HEIGHT	4"
HOUSING TYPE	New construction NON IC Airtight
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Downlight
BEAM ANGLE	18°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	70.59
LUMINOUS FLUX	1200 lumens



Shown in black powder coat

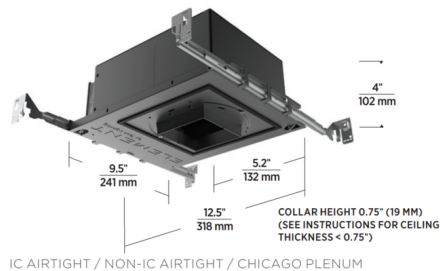

CLICK TO VIEW PRODUCT

Notes: