



BRAND

Visual Comfort Architectural

DESCRIPTION

The 3 Inch Square 90CRI Flanged Fixed Downlight Non-IC Airtight, IC Airtight, or Chicago Plenum New Construction Housing for use with square flanged trims. Features an integral 12 watt or 17 watt LED module in three color temperature options or Warm Dim (3000K-1800K) with 10, 18, 25, 40 or 60 degree beam angle options. 3 7/8 inch ceiling cutout. Suitable for damp locations. Suitable for wet locations with shower trim. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming Note: A complete fixture requires a housing and trim, sold separately. Note: 10 degree beam angle not available for Warm Dim option.



IC AIRTM


Shown in: Matte Black

TRIM COLOR	N/A
BODY FINISH	Matte Black
WATTAGE	17W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.5"W x 4"H x 9.5"D
INTEGRATED LED MODULE	
LAMP	1 x LED/17W/120-277V LED

Technical Information

LUMINOUS FLUX	1450 lumens
LUMENS/WATT	85.29
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	18°
LAMP LIFE	50000 hours
FUNCTION	Downlight
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC

SPEC #	ELE364894
--------	-----------

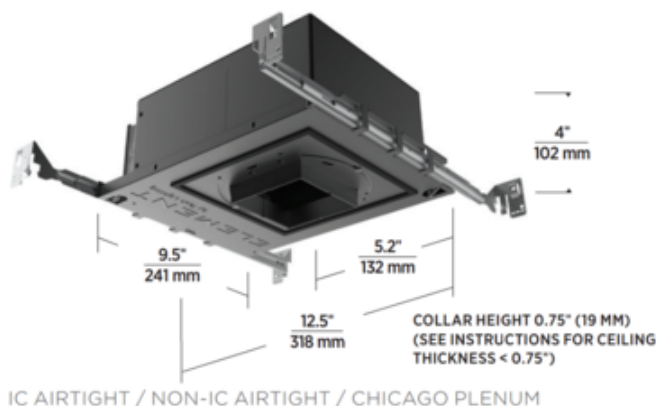

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE