

Lightology

lightology.com
866-954-4489
03-07-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **BEA36980**

Approved On: _____ Approved By: _____

4IN New Construction Housing 12V - Discontinued Model

By Beach Lighting



Description

R4-499AT 4 inch Non-IC Airtight New Construction Housing is designed for use in 12V low voltage applications. Non-IC designation requires that housing be a minimum of 3 inches away from insulation. Airtight feature prevents airflow between attic and living areas. Accommodates one 12 volt, GU5.3 MR16 halogen up to 50 watts (or LED equivalent), sold separately. Supplied with a low voltage magnetic transformer. Halogen dimmable with a low voltage magnetic dimmer. See LED bulb manufacturer for dimmer compatibility with a magnetic transformer when using LED equivalent. Ceiling cut out 4.25 inch. A complete fixture requires a housing and trim, sold separately. NOTE: This is a discontinued model and limited to quantity on hand.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	50W
DIMMER	Low Voltage Magnetic
DIMENSIONS	8"W x 5.5"H
BULB NOT INCLUDED	1 x MR16/GU5.3 (bipin)/50W/12V Halogen
OTHER BULB OPTIONS	1 x MR16/GU5.3 (bipin)/12V LED

Technical Information

HOUSING HEIGHT	6"
HOUSING TYPE	New construction NON IC Airtight
CEILING TYPE	Drywall with Trim



Shown in galvanized steel

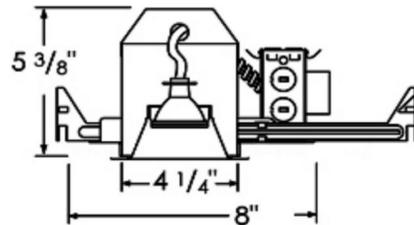

CLICK TO VIEW PRODUCT

Notes: