



BRAND

Contrast Lighting

DESCRIPTION



Modul Aim 1-Light Warm Dim Modular Base Unit Assembled Housing with 26 or 41 Degree Beam Angle is a true modular approach that will let you configure L, cross, square, staggered units and even more configurations by assembling the units together in a fast and easy way. Features a powder coated 22 gauge galvanized steel housing to fit in ceilings up to 2 inch thick for remodel and 1 inch thick for new construction. Available in Matte White or Matte Black. Non-IC rating requires no direct contact with insulation and at least 3 inch clearance between housing and insulation. Swivels 360 degrees and tilts 40 degrees with a one screw locking device to lock both axis in position. Includes 20 watts LED with Warm Dim Lumenetix Araya DDMI Dynamic Dimming Module, delivering dimmable white light that warms as it dims reproducing dimming conditions of a halogen lamp. It allows the user to change the color temperature from 3050K at full intensity to 1800K at a minimum intensity while ensuring a 90+ CRI over the full dimming range. 936 lumens at 3000K/43 lumens per watt with a lumen maintenance greater than 70 percent after 50,000 hours of operation. Optical reflectors available in 26 degree narrow flood and 41 degree wide flood. UL listed for damp locations. Energy Star certified. 5 year warranty on LED module and driver. 6.25 inch x 6.25 inch ceiling cut-out. Available in a with trim option, offered in three finishes, or a trimless option requiring a mesh plate. Mask accessory available to conceal interior components to give a more finished look. Dimmable with 0-10V dimmer- see attached Performance 1 manufacturer dimmer compatibility recommendations. Use remodeler, new construction and suspension cable installation kits, depending on application. Required trim, trimless mesh plate, mask, installation kit and dimmer control sold separately.



TRIM COLOR	N/A
BODY FINISH	Matte Black
WATTAGE	20W
DIMMER	0-10V
DIMENSIONS	6"W x 7.56"H x 6"D
INTEGRATED LED MODULE	
LAMP	1 x LED/20W/120V LED

Technical Information

LUMINOUS FLUX	936 lumens
LUMENS/WATT	46.80
LAMP COLOR	3000K Warm Dim
COLOR RENDERING	90 CRI
BEAM ANGLE	26°
LAMP LIFE	50000 hours
FUNCTION	Adjustable Accent
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
HOUSING HEIGHT	8"
SPEC #	CLT372150

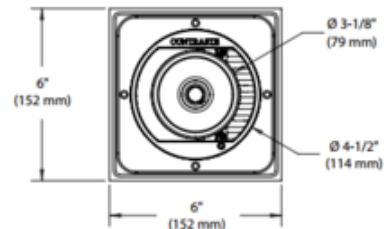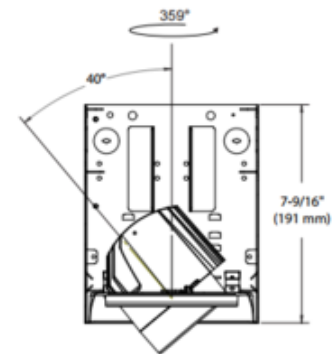

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE