

# Lightology

lightology.com  
866-954-4489  
07-09-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG376634**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Glide Glass Up/Down Center Feed Linear Suspension By PureEdge Lighting



### Description

Glide Glass Up/Down Center Feed Linear Suspension is a two-circuit system featuring both direct and indirect LED light in a clean and refined contemporary style. Available in a spectrum of color temperature options with 7 watts (2W up and 5W down), 10 watts (5W up and 5W down) or 12 watts (5W up and 7W down) per foot, or 7 watts per foot in Warm Dim 2700K-2000K (27D) or 3000K-2000K (30D) color temperature. Unlike standard LEDs, Warm Dim LEDs are designed to shift to a warmer color temperature as they are dimmed, replicating the effects of incandescent and halogen light sources. Offered in 12 inch increments from 36 to 120 inches. Available in Black, White or Mirror glass with 100 degree diffused white downlight lens, 60 degree clear frosted uplight lens, and optional black or white louvers. Includes rectangle canopy with 120V input/24VDC output Universal (UNI) LED power supply, dimmable with an electronic low voltage (ELV), 0-10V or Triac (magnetic) dimmer, sold separately. Supplied with 12 feet of adjustable coaxial cables (fixtures exceeding 72 inch include additional aircraft cables). Note: Product is built to order.

### Specifications


COLOR . . . . . No Louver  
 BODY FINISH . . . . . Black Glass  
 WATTAGE . . . . . 22.5W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 36"L x 1.74"W x 2.5"H  
 INTEGRATED LED MODULE . . . . . 3 x LED/7.5W/120V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
 COLOR RENDERING . . . . . 92 CRI  
 LAMP COLOR . . . . . 3000K  
 LUMENS/WATT . . . . . 152.00  
 LUMINOUS FLUX . . . . . 1140 lumens



Shown in black glass / no louver

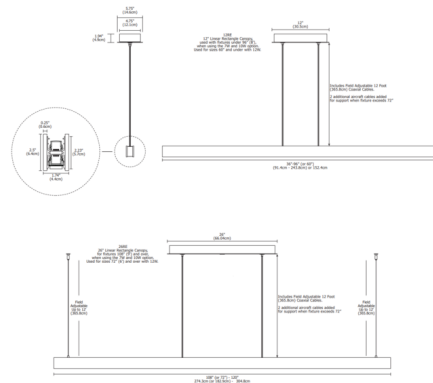

CLICK TO VIEW PRODUCT

Notes: