

Lightology

lightology.com
866-954-4489
04-24-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG376634**
 Approved On: _____ Approved By: _____

Glide Glass Up/Down Center Feed Linear Suspension By PureEdge Lighting



Description

Glide Glass Up/Down Center Feed Linear Suspension is a two-circuit system featuring both direct and indirect LED light in a clean and refined contemporary style. Available in a spectrum of color temperature options with 7 watts (2W up and 5W down), 10 watts (5W up and 5W down) or 12 watts (5W up and 7W down) per foot, or 7 watts per foot in Warm Dim 2700K-2000K (27D) or 3000K-2000K (30D) color temperature. Unlike standard LEDs, Warm Dim LEDs are designed to shift to a warmer color temperature as they are dimmed, replicating the effects of incandescent and halogen light sources. Offered in 12 inch increments from 36 to 120 inches. Available in Black, White or Mirror glass with 100 degree diffused white downlight lens, 60 degree clear frosted uplight lens, and optional black or white louvers. Includes rectangle canopy with 120V input/24VDC output Universal (UNI) LED power supply, dimmable with an electronic low voltage (ELV), 0-10V or Triac (magnetic) dimmer, sold separately. Supplied with 12 feet of adjustable coaxial cables (fixtures exceeding 72 inch include additional aircraft cables). Note: Product is built to order.

Specifications


COLOR	No Louver
BODY FINISH	Black Glass
WATTAGE	22.5W
DIMMER	Low Voltage Electronic
DIMENSIONS	36"L x 1.74"W x 2.5"H
INTEGRATED LED MODULE	3 x LED/7.5W/120V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	92 CRI
LAMP COLOR	3000K
LUMENS/WATT	152.00
LUMINOUS FLUX	1140 lumens



Shown in black glass / no louver

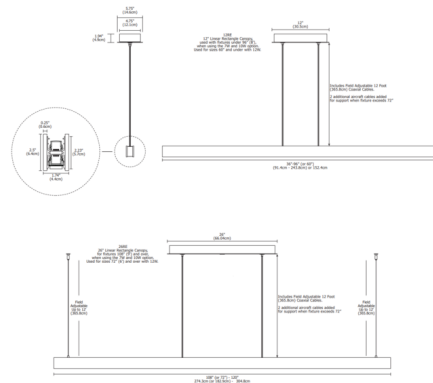

CLICK TO VIEW PRODUCT

Notes: