

# Lightology

lightology.com  
866-954-4489  
07-18-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG377587**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Verge Ceiling Plaster-In System 24V

By PureEdge Lighting



### Description

Verge Ceiling features an innovative design that recesses within 5/8 inch drywall without joist modification. Available in 1 foot increments up to 40 feet (2.5 Watt) and 20 feet (5 Watt) and is field-cuttable. The plaster-in aluminum extrusion features a 4 inch paintable backer plate and highlights ceiling perimeters while emitting smooth and continuous ambient illumination. Included Components: Junction Box, Adjustable Mounting Bars, Backer Plate, Verge Ceiling Channel(s), Drywall Screws, LED Soft Strip and Lens(es). A VG-IRE-JBOX rough-in junction box is available to rough-in electrical before drywall installation (included and sold separately). Product is built to order. System requires a remote Universal (UNI) or Lutron Hi-Lume power supply. Note: Required power supply, dimmer control, and optional mounting accessories sold separately. Note: Limited quantities available.

### Specifications


COLOR . . . . . N/A  
BODY FINISH . . . . . Satin Aluminum  
WATTAGE . . . . . 12.5W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 60"L x 4.13"W x 0.62"H  
INTEGRATED LED MODULE . . . . . 5 x LED/2.5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 95 CRI  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 372.00  
LUMINOUS FLUX . . . . . 930 lumens



Shown in satin aluminum

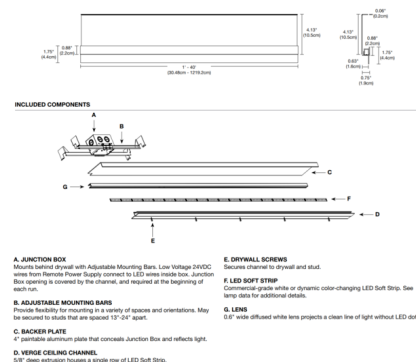

CLICK TO VIEW PRODUCT

Notes: