

Lightology

lightology.com
866-954-4489
04-25-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **WAC379043**
 Approved On: _____ Approved By: _____

Low Voltage Multiples 2-Light New Construction NIC Housing By WAC Lighting



Description


Low Voltage Multiple Spot Series 2-Light Non-IC New Construction Housing is constructed of aluminum with galvanized steel frame, junction box and hanger bars. Non-IC designation requires that insulation be kept a minimum of 3 inches away from insulation. Supplied with 120 volt AC input transformer. Accommodates surface thickness of 2 to 1 inch. 5 3/16 x 9 1/8 inch cutout for flanged trim. 5 5/8 x 9 5/8 inch cutout for invisible trim. Available with LED or halogen lamp options. LED option includes two 12 volt GU5.3 MR16 lamps. Halogen option requires two 12 volt, up to 50 watt max GU5.3 MR16 lamps, but are not included. A complete fixture includes a housing and trim, sold separately.

Specifications



REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	100W
DIMMER	Low Voltage Electronic
DIMENSIONS	18"L x 8"W x 7.25"H
BULB NOT INCLUDED	2 x MR16/GU5.3 (bipin)/50W/12V LED
OTHER BULB OPTIONS	2 x MR16/GU5.3 (bipin)/7W/12V LED
COUNTRY OF ORIGIN	China

Technical Information

APERTURE SIZE	10.000"
HOUSING HEIGHT	8"
HOUSING TYPE	New Construction NON IC

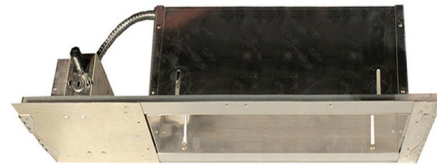

Shown in aluminum



CLICK TO VIEW PRODUCT

Notes: