




BRAND Contrast Lighting

DESCRIPTION

IT2000M 4 inch low voltage Non-IC remodel housing is equipped with thermal protection. Cannot be used in contact with insulation and should be at least 3 inches from insulation. Magnetic 120 volt to 12 volt transformer included. Takes up to 7/8 inch thick ceiling. Below ceiling accessible. One 50 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Dimmable with a low voltage magnetic dimmer. Suitable for damp locations. UL listed. 13.6 inch length x 5.1 inch width x 6 inch height. A complete fixture includes a housing and trim, sold separately.


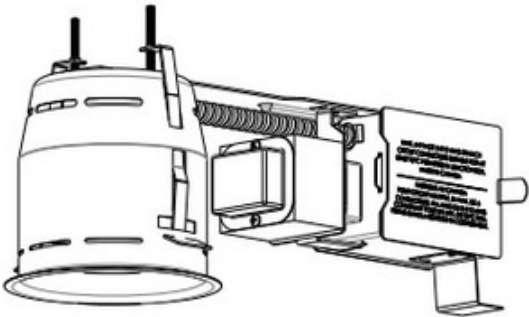


TRIM COLOR	N/A
BODY FINISH	N/A
WATTAGE	N/A
DIMMER	Low Voltage Magnetic
DIMENSIONS	12.913"L x 5.1"W x 6"H
LAMP	N/A

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	6"

SPEC # CLT3800

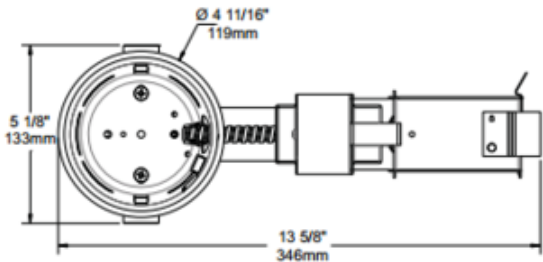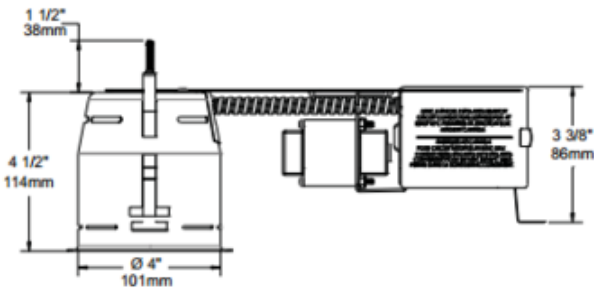

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE