



BRAND

Contrast Lighting

DESCRIPTION

IT3000LM 3.5 Inch Low Voltage Non-IC Remodel Housing is thermally protected and designed for non insulated remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to a 7/8 inch ceiling thickness. Low voltage 12 volt magnetic transformer included. One 42-50 watt, 12 volt GU5.3 MR16 bulb is required, but not included. Wattage dependent on housing/trim combination. Dimmable with a low voltage magnetic dimmer. Consult bulb manufacturer for low voltage magnetic dimmer compatibility when using LED bulb option. Suitable for damp locations. UL listed. 3 5/8 inch ceiling cut out. 13.4 inch length x 4.5 inch width x 7.1 inch height. A complete fixture includes a housing and trim, sold separately.




TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	50W
DIMMER	Low Voltage Magnetic
DIMENSIONS	13.3"L x 4.5"W x 7.1"H
BULB NOT INCLUDED	
LAMP	MR16/GU5.3 (bipin)/50W/12V Halogen MR16/GU5.3 (bipin)/12V LED

Technical Information

CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	7"
APERTURE SIZE	3.500"

SPEC #	CLT3805
--------	---------

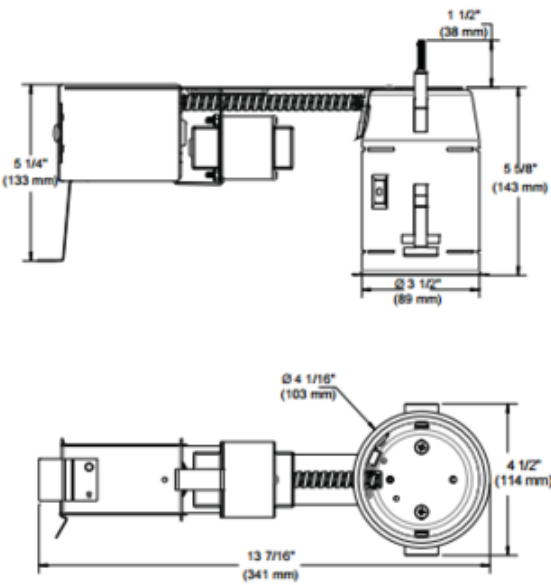

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE