

Low Voltage 2.5IN Shallow Remodel Magnetic Non-IC Housing



Description:



IT5000CM 2.5 Inch Low Voltage Non-IC Remodel Shallow Housing is equipped with thermal protection and is designed for remodel applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Below ceiling accessible. Takes up to 7/8 inch ceiling thickness. Low voltage 12 volt magnetic transformer is included. One 20 watt, 12 volt GU4 MR11 bulb is required, but not included. Dimmable with a low voltage magnetic dimmer. Suitable for damp locations. UL listed. 2 5/8 inch ceiling cut out. 11.75 inch length x 3.7 inch width x 3.25 inch height. A complete fixture includes a housing and trim, sold separately.



Shown in: Galvanized Steel

List Price: \$91.00
 Our Price: \$36.40

Shade Color: N/A
 Body Finish: Galvanized Steel
 Lamp: 1 x MR11/Bipin/20W/12V Halogen
 Wattage: 20W
 Dimmer: Low Voltage Magnetic
 Dimensions: 11.75"L x 3.7"W x 3.25"H

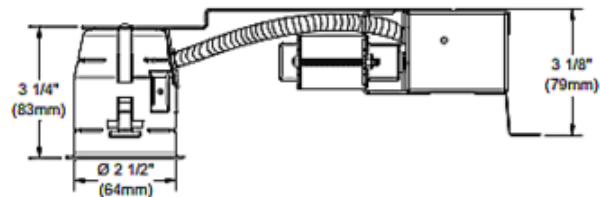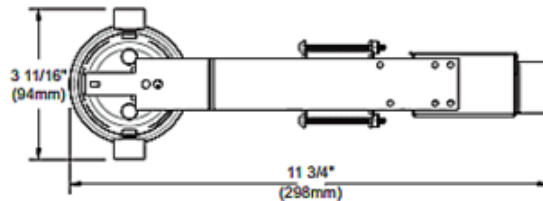

Technical Information

Ceiling Type: Drywall with Trim
 Housing Type: Remodel NON IC
 Housing Height: 4"
 Aperture Size: 2.500"
 Product Dimensions: Cutout: 2 5/8"

Product Number: CLT3808			
Company:		Fixture Type:	Date: Sep 17, 2019
Project:		Approved By:	

#0314RE-IT5000-011H1-OOMT

Phone: 866-954-4489 Fax: (773) 883-6131

Address: 1718 W. Fullerton Ave. Chicago IL 60614

www.Lightology.com