



**DESIGNER**

Gregory Kay

**BRAND**

PureEdge Lighting

**DESCRIPTION**

Glide Wood Up/Down Center Feed Linear Suspension is a two-circuit system featuring both direct and indirect LED light. Available in a spectrum of color temperature options with 7 watts (2W up and 5W down), 10 watts (5W up and 5W down) or 12 watts (5W up and 7.5W down) per foot. Offered in 12 inch increments from 36 to 120 inches. Available in Walnut, Cherry, White Oak, Espresso or Maple wood finish with 100 degree diffused white downlight lens, 60 degree clear frosted uplight lens, and optional black or white louvers. Includes rectangle canopy with 120V input/24VDC output Universal (UNI) LED power supply. Dimmable with an electronic low voltage (ELV), 0-10V, or Triac (magnetic) dimmer, sold separately. Note: Product is built to order.




*Shown in: Wood Cherry / No Louver*

<b>SHADE COLOR</b>	No Louver
<b>BODY FINISH</b>	Wood Cherry
<b>WATTAGE</b>	36W
<b>DIMMER</b>	Low Voltage Electronic
<b>DIMENSIONS</b>	36"L x 1.74"W x 2.5"H
<b>INTEGRATED LED MODULE</b>	
<b>LAMP</b>	3 x LED/12W/120V LED

*Technical Information*

<b>LUMINOUS FLUX</b>	1800 lumens
<b>LUMENS/WATT</b>	150.00
<b>LAMP COLOR</b>	2700K
<b>COLOR RENDERING</b>	92 CRI

**SPEC #** EDG392580

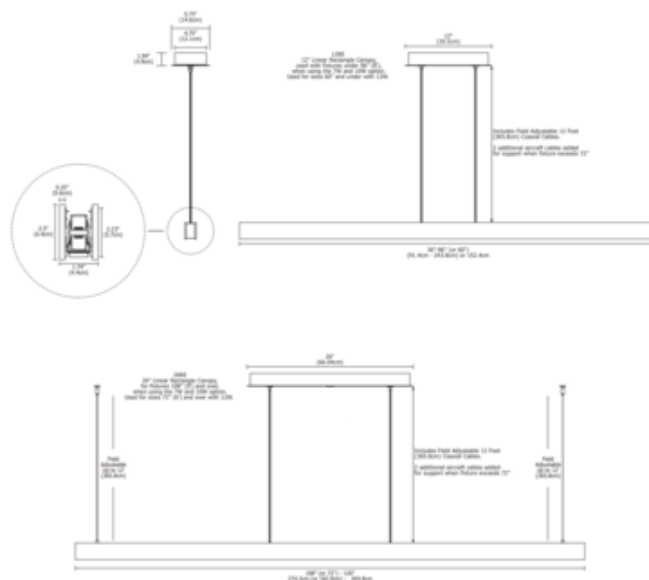

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE