

# Lightology

lightology.com  
866-954-4489  
06-30-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG392580**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Glide Wood Up/Down Center Feed Linear Suspension By PureEdge Lighting



### Description

Glide Wood Up/Down Center Feed Linear Suspension is a two-circuit system featuring both direct and indirect LED light. Available in a spectrum of color temperature options with 7 watts (2W up and 5W down), 10 watts (5W up and 5W down) or 12 watts (5W up and 7.5W down) per foot. Offered in 12 inch increments from 36 to 120 inches. Available in Walnut, Cherry, White Oak, Espresso or Maple wood finish with 100 degree diffused white downlight lens, 60 degree clear frosted uplight lens, and optional black or white louvers. Includes rectangle canopy with 120V input/24VDC output Universal (UNI) LED power supply. Dimmable with an electronic low voltage (ELV), 0-10V, or Triac (magnetic) dimmer, sold separately. Note: Product is built to order.

### Specifications


COLOR	No Louver
BODY FINISH	Wood Cherry
WATTAGE	36W
DIMMER	Low Voltage Electronic
DIMENSIONS	36"L x 1.74"W x 2.5"H
INTEGRATED LED MODULE	3 x LED/12W/120V LED

### Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	92 CRI
LAMP COLOR	2700K
LUMENS/WATT	150.00
LUMINOUS FLUX	1800 lumens



Shown in wood cherry / no louver

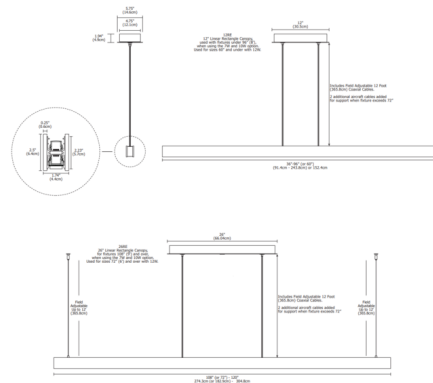

CLICK TO VIEW PRODUCT

Notes: