

# Lightology

lightology.com  
866-954-4489  
12-09-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG392580**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Glide Wood Up/Down Center Feed Linear Suspension By PureEdge Lighting



### Description

Glide Wood Up/Down Center Feed Linear Suspension is a two-circuit system featuring both direct and indirect LED light. Available in a spectrum of color temperature options with 7 watts (2W up and 5W down), 10 watts (5W up and 5W down) or 12 watts (5W up and 7.5W down) per foot. Offered in 12 inch increments from 36 to 120 inches. Available in Walnut, Cherry, White Oak, Espresso or Maple wood finish with 100 degree diffused white downlight lens, 60 degree clear frosted uplight lens, and optional black or white louvers. Includes rectangle canopy with 120V input/24VDC output Universal (UNI) LED power supply. Dimmable with an electronic low voltage (ELV), 0-10V, or Triac (magnetic) dimmer, sold separately. Note: Product is built to order.

### Specifications


COLOR . . . . . No Louver  
BODY FINISH . . . . . Wood Cherry  
WATTAGE . . . . . 36W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 36"L x 1.74"W x 2.5"H  
INTEGRATED LED MODULE . . . . . 3 x LED/12W/120V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 92 CRI  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 150.00  
LUMINOUS FLUX . . . . . 1800 lumens



Shown in wood cherry / no louver

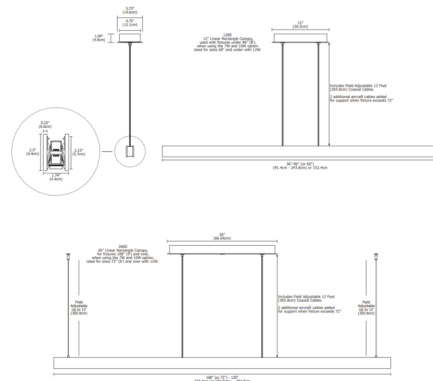

CLICK TO VIEW PRODUCT

Notes: