



BRAND

Hadco by Signify

DESCRIPTION

BUL16 LED 25 Degree or 35 Degree Bullyte with Mounting Stake housing is fabricated from a one piece injection molded high performance polymer composite with fully rotatable gasketed shroud and fully adjustable swivel arm with vibration proof locking teeth. Clear tempered glass affixed at 10 degree angle for natural cleaning. Includes 1.4 inch diameter x 9.5 inch length S7 PVC mounting stake. Fixture features integral .5 inch NPS fitter. Available in a 25 and 35 degree beam spread option. Pre-wired with 3 foot pigtail of 18-2 AWG wire. Includes low voltage quick connector LVC3 for easy hook up to the low voltage supply cable, sold separately. ETL listed for wet locations. Note: Required low voltage remote transformer and optional mounting accessories sold separately.




Shown in: Bronze

| | |
|----------------------|-----------------------------------|
| SHADE COLOR | N/A |
| BODY FINISH | Bronze |
| WATTAGE | 7W |
| DIMMER | Dimmable |
| DIMENSIONS | 6.5"L x 3.1"W |
| BULB INCLUDED | |
| LAMP | 1 x MR16/GU5.3 (bipin)/7W/12V LED |

Technical Information

| | |
|------------------------|------------|
| LUMINOUS FLUX | 460 lumens |
| LUMENS/WATT | 65.71 |
| LAMP COLOR | 3000K |
| COLOR RENDERING | 80 CRI |
| BEAM ANGLE | 25° |

SPEC # HAD400543

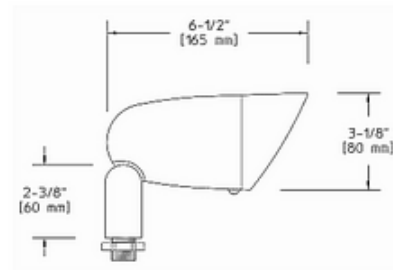

| COMPANY | PROJECT | FIXTURE TYPE | APPROVED BY | DATE |
|---------|---------|--------------|-------------|------|
| | | | | |