

Lightology

lightology.com
866-954-4489
07-18-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **WAC424020**
Approved On: _____ Approved By: _____

LEDme Square Recessed / Surface Button Light

By WAC Lighting



Description

LEDme Square Button Lights deliver strong light output with long lasting life and performance using the latest energy efficient LED technology. Ideal for recessed or surface mounting in-cabinet or under-cabinet installations such as luxury retail displays. Made of die-cast aluminum available in Brushed Nickel, Chrome, White, Black, Dark Bronze or Copper Bronze finish. Separate outer stamp steel housing for surface mount. Includes compression springs for recessed to hold fixture firmly in place. 2 1/8 inch cut out for recessed. Beam spread glass provided for even light distribution. Includes 72 inch pre-installed lead wires that lead out through the top for connection to a remote driver and five clips for mounting. Includes six 24 volt LEDs totaling 4.8 watts, Very Warm White 2700K or Warm White 3000K color temperature, 85CRI. Replaceable LED module. Comparable to a 20 watt Xenon bulb. 70,000 hour average lamp life. Dimmable with low voltage electronic dimmer. General light distribution. Not recommended for use in ceiling. UL listed. 5 year product warranty. 2.25 inch square. 5/8 inch height recessed. 7/8 inch height surface mount. Requires Class 2 24 volt remote LED power supply. Multiple terminal block accessory for multiple output connections and frosted lens accessory available. Required power supply, optional terminal block, and frosted lens accessory, sold separately.

Specifications


COLOR	N/A
BODY FINISH	Dark Bronze
WATTAGE	4.8W
DIMMER	Low Voltage Electronic
DIMENSIONS	2.25"W x 0.88"H
INTEGRATED LED MODULE	1 x LED/4.8W/24V LED
COUNTRY OF ORIGIN	China

Technical Information

LAMP LIFE	70000 hours
COLOR RENDERING	85 CRI
LAMP COLOR	3000K
LUMENS/WATT	32.29
LUMINOUS FLUX	155 lumens



Shown in dark bronze

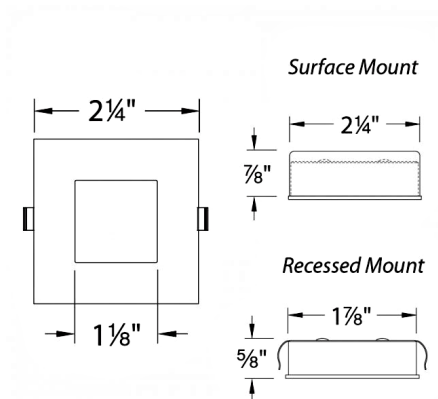

CLICK TO VIEW PRODUCT

Notes: