



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

Glide Glass Center Feed Downlight Suspension features a diffused white lens with 100 degree beam spread. Glass available in Black, White or Mirror with optional black or white louvers. Channel lengths sold in 12 inch increments from 36 to 120 inches with 5, 7 or 10 watt options. Available in a variety of color temperature options. Includes rectangle canopy with 120V input/24VDC output Universal (UNI) LED power supply (dimmmable with an electronic low voltage (ELV), 0-10V, or Triac (magnetic dimmer). Note: Product is built to order.



Shown in: Mirror Glass / No Louver


SHADE COLOR	No Louver
BODY FINISH	Mirror Glass
WATTAGE	30W
DIMMER	Low Voltage Electronic
DIMENSIONS	36"L x 1.74"W x 2.5"H
INTEGRATED LED MODULE	
LAMP	3 x LED/10W/120V LED

Technical Information

LUMINOUS FLUX	1290 lumens
LUMENS/WATT	129.00
LAMP COLOR	2700K
COLOR RENDERING	92 CRI

SPEC #

EDG429286

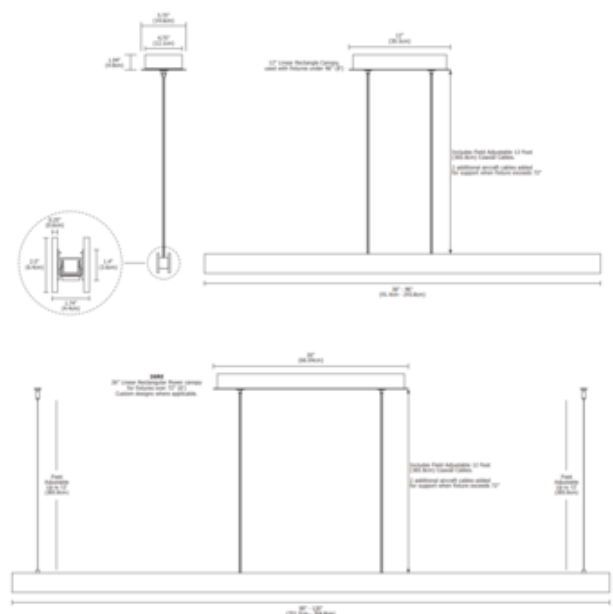

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE