

# Lightology

lightology.com  
866-954-4489  
02-12-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG429601**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Glide Wood Downlight Suspension w/ Center Feed Power

By PureEdge Lighting



### Description

Glide Wood Center Feed Downlight Suspension features a diffused white lens with 100 degree beam spread. Wood options include Maple, Walnut, Cherry, Wood White Oak or Espresso with optional black or white louver. Channel lengths sold in 12 inch increments from 36 to 120 inches. Available in three wattage options and a spectrum of color temperature options. Includes rectangle canopy with 120V input/24VDC Universal (UNI) LED power supply. Dimmable with an electronic low voltage (ELV), 0-10V, or Triac (magnetic) dimmer, sold separately. Note: Product is built to order.

### Specifications


COLOR . . . . . No Louver  
BODY FINISH . . . . . Wood Walnut  
WATTAGE . . . . . 15W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 36"L x 1.74"W x 2.5"H  
INTEGRATED LED MODULE . . . . . 3 x LED/5W/120V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 92 CRI  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 162.00  
LUMINOUS FLUX . . . . . 810 lumens



Shown in wood walnut / no louver

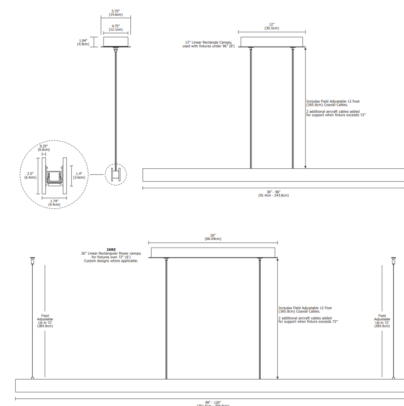

CLICK TO VIEW PRODUCT

Notes: