Lightology

lightology.com
866-954-4489
10-30-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EDG429601**

Approved On: Approved By:

Glide Wood Downlight Suspension w/ Center Feed Power


By PureEdge Lighting


Description

Glide Wood Center Feed Downlight Suspension features a diffused white lens with 100 degree beam spread. Wood options include Maple, Walnut, Cherry, Wood White Oak or Espresso with optional black or white louver. Channel lengths sold in 12 inch increments from 36 to 120 inches. Available in three wattage options and a spectrum of color temperature options. Includes rectangle canopy with 120V input/24VDC Universal (UNI) LED power supply. Dimmable with an electronic low voltage (ELV), 0-10V, or Triac (magnetic) dimmer, sold separately. Note: Product is built to order.



Shown in wood walnut / no louver

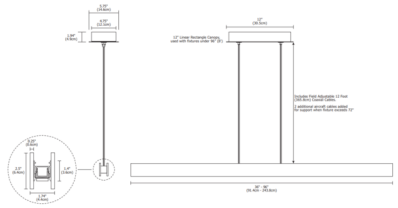

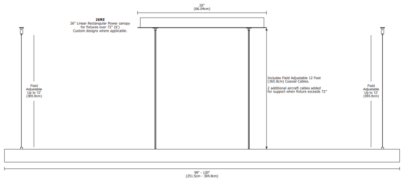

Specifications

COLOR	No Louver
BODY FINISH	Wood Walnut
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	36"L x 1.74"W x 2.5"H
INTEGRATED LED MODULE	3 x LED/5W/120V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	92 CRI
LAMP COLOR	2700K
LUMENS/WATT	162.00
LUMINOUS FLUX	810 lumens

CLICK TO VIEW PRODUCT

Notes: