

Lightology

lightology.com
866-954-4489
05-21-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **EDG429601**

Approved On: _____ Approved By: _____

Glide Wood Downlight Suspension w/ Center Feed Power

By PureEdge Lighting



Description

Glide Wood Center Feed Downlight Suspension features a diffused white lens with 100 degree beam spread. Wood options include Maple, Walnut, Cherry, Wood White Oak or Espresso with optional black or white louver. Channel lengths sold in 12 inch increments from 36 to 120 inches. Available in three wattage options and a spectrum of color temperature options. Includes rectangle canopy with 120V input/24VDC Universal (UNI) LED power supply. Dimmable with an electronic low voltage (ELV), 0-10V, or Triac (magnetic) dimmer, sold separately. Note: Product is built to order.

Specifications


COLOR No Louver
 BODY FINISH Wood Walnut
 WATTAGE 15W
 DIMMER Low Voltage Electronic
 DIMENSIONS 36"L x 1.74"W x 2.5"H
 INTEGRATED LED MODULE 3 x LED/5W/120V LED

Technical Information

LAMP LIFE 50000 hours
 COLOR RENDERING 92 CRI
 LAMP COLOR 2700K
 LUMENS/WATT 162.00
 LUMINOUS FLUX 810 lumens



Shown in wood walnut / no louver

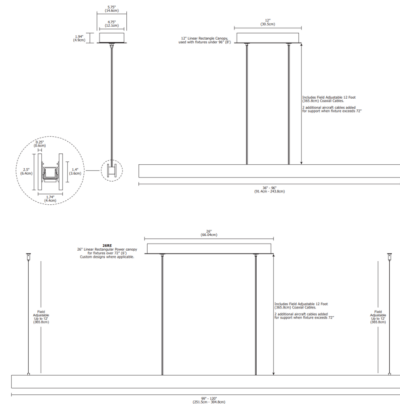

CLICK TO VIEW PRODUCT

Notes: