



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

Glide Wood Downlight with Center Feed features a direct 1 inch flat milky white lens and a 60 degree beam spread. Available with a Black or White louver or without a louver. Wood options include Wood Maple, Wood Walnut, Wood Cherry, or Wood White Oak with Satin Nickel channel, or Wood Espresso with Black channel. All wood used in this fixture is sourced in the USA. Channel widths available in 12 inch increments from 36 to 120 inches. Custom widths available in 2.4 inch increments. Includes 7.5 watts per foot with choice of Very Warm White 2700K or Warm White 3000K color temperature, 92+CRI, or Neutral White 3500K, Cool White 4000K or Daylight White 5700K, 85+CRI. 50 lumens per watt/375 lumens per foot. Lumen values are based on the 3000K LED test without louver. 50,000 hour average lamp life. Includes rectangle canopy with 24VDC Class 2 LED power supply. Dimmable with an electronic low voltage dimmer: (Lutron Diva DVELV-300P, Lutron Skylark SELV-300P, Lutron Maestro MAELV-600 and Lutron Radio Ra 2, or Legrand Adorne ADTP703TU), sold separately. Includes adjustable 12 foot aircraft suspension cables. Two additional aircraft cables are added for support when channel lengths are wider than 96 inch. Includes Satin Nickel hardware and supporting cables. ETL listed. Major components made and assembled in the USA. 5 year warranty. Product is built to order.




Shown in: Wood Walnut / No Louver

SHADE COLOR	No Louver
BODY FINISH	Wood Walnut
WATTAGE	22.5W
DIMMER	Low Voltage Electronic
DIMENSIONS	36"L x 1.74"W x 2.5"H
INTEGRATED LED MODULE	
LAMP	3 x LED/120V LED

Technical Information

LUMINOUS FLUX	1125 lumens
LUMENS/WATT	150.00
LAMP COLOR	2700K
COLOR RENDERING	92 CRI

SPEC # EDG429891

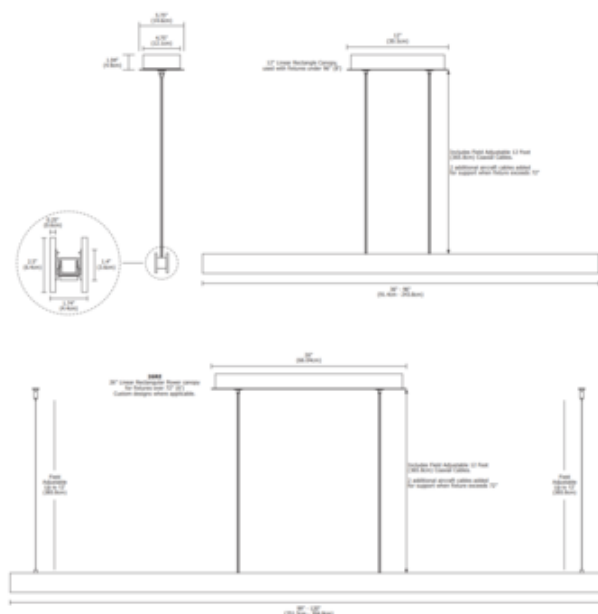

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE